



# PRODUCT CATALOG

---

THE CONSTRUCTION INDUSTRY'S NEW STANDARD

---

---

# TABLE OF CONTENTS

---

INTRODUCTION . . . . .	3
ABOUT US . . . . .	4
SPRAY-LOCK TIMELINE . . . . .	5
PRODUCT SPECIFICATIONS . . . . .	6 - 9
PRODUCT BENEFITS . . . . .	10
COMMERCIAL & RETAIL . . . . .	11
HEALTHCARE . . . . .	12 - 13
HOSPITALITY . . . . .	14
INDUSTRY PROVEN . . . . .	15
ENVIRONMENTAL IMPACT . . . . .	16
LEED POINT SUMMARY . . . . .	17
SUSTAINABILITY & USAGE . . . . .	17
ESD 1005 ADHESIVE . . . . .	18
FRP ADHESIVE . . . . .	19
RUGLOCK . . . . .	20 - 21
WALL TILE ADHESIVE . . . . .	22
WARRANTIES . . . . .	23
TECHNICAL SUPPORT . . . . .	23
AIA EDUCATION . . . . .	23

# INTRODUCTION



Spray-Lock, Inc. has invented and produced a revolutionary line of Premium Eco Adhesives, using the world's most advanced and earth-friendly adhesive technology for floor and wall applications. Our products positively impact the environment and perform better than most trowel adhesives. Some of our products' benefits include:

- **Up to 80% less adhesive use**
- **High shear strength upon application**
- **High moisture and pH resistance**
- **No HVAC shutdown**
- **No trowel marks**
- **Immediate access to all traffic**
- **0.0 g/mL VOCs**
- **Flooring re-use and recycling**
- **Reduction of work-related injuries**
- **No offensive odors**

**5-YEAR WARRANTIES ON OVER 600+ FLOORING PRODUCTS**

## CERTIFICATIONS



Products bearing the FloorScore logo meet the indoor air quality emissions criteria of LEED, CHPS, the Green Guide for Healthcare, and are recognized by a long list of healthy building programs.



Products bearing the CRI Green Label Plus logo are tested and found to have very low emissions of Volatile Organic Compounds (VOCs), setting a higher standard for indoor air quality (IAQ).



Products bearing the Green Seal Certified logo meet Green Seal™ Standard GS-36 based on effective performance and protective limits on VOCs and human and environmental toxicity.



All Spray-Lock products exceed US EPA Indoor Air Quality Standards for VOCs by having 0.0 g/mL VOCs, according to EPA Test Method 8260B.


---

# OUR COMPANY

---

After years in the aerosol business, President/CEO Fred Land became concerned with the environmental impact of certain chemicals, leading him to create Spray-Lock Premium Eco Adhesives. Our adhesives greatly improve indoor air quality (when compared to traditional adhesive use), increase productivity and deliver occupational safety and health benefits. They also promote recycling and sustainability with 100% recyclable cans and packaging.

At Spray-Lock, we believe we are more than adhesives. We are solutions that stick. When you use Spray-Lock Eco Adhesives for your floor and wall installations, you get solutions:

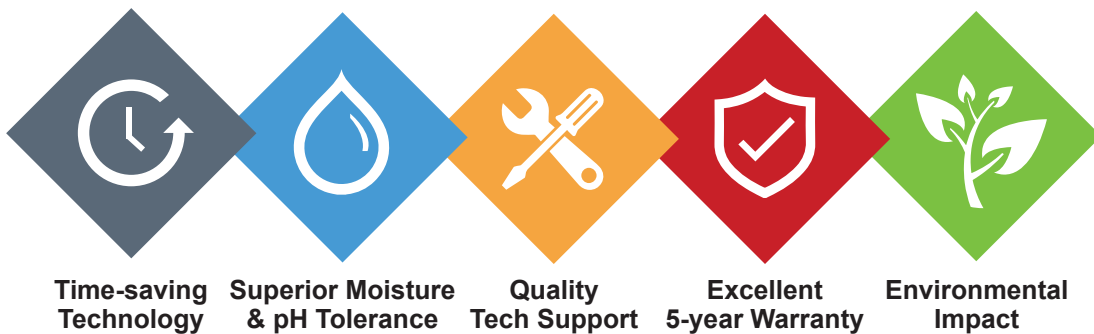

## OUR MISSION

Spray-Lock's mission is to develop and promote superior adhesives that reduce adhesive consumption by 80%, while saving the industry time and money.



Thank you for considering our Spray-Lock Adhesives technology. We are continuously developing new formulas for a variety of other applications and are happy to do testing for our clients. Every day we strive to maintain the highest standards of excellence and integrity. I hope this Spray-Lock ethic will be evident as we provide support to you and your construction needs.

Sincerely,

**Fred Land**  
*President, Spray-Lock, Inc.*



# THE SPRAY-LOCK TIMELINE

MATURE TECHNOLOGY PROVEN SINCE 1997



1997

Spray-Lock Premium Eco Adhesives technology first entered the marketplace.



2000

Mohawk began using Spray-Lock Adhesives to apply carpet tile.



2004

Walmart's 300 million ft<sup>2</sup> program specified use of Spray-Lock Platinum 6500 Adhesive in LVT application.

2006

Spray-Lock began private labeling for multiple flooring manufacturers.

2007

Spray-Lock expanded to flooring companies in Australia, New Zealand, United Kingdom, Japan and Germany.

2008

Spray-Lock began selling direct.

2009

Spray-Lock became ISO certified.

2011

Spray-Lock began national distribution.



2014

Spray-Lock launched its new innovative consumer product, RugLock.



2017

Spray-Lock Adhesives are now used in more than 19 countries and represented by distribution throughout the United States.

# PRODUCT SPECIFICATIONS

## FULL LINE PREMIUM ECO-ADHESIVES

The reputation of Spray-Lock Premium Eco Adhesives for meeting fast-track building schedules has changed the construction industry. Time-tested in over 1/2 billion square feet of flooring installations worldwide, our adhesives continue to prove invaluable. Spray-Lock's technical team has tested over 600 flooring products with our adhesive range and we offer PDF statements of performance supporting each approved flooring product on our website. **To find out which formula is best for your flooring and substrate, visit [www.spraylock.com](http://www.spraylock.com) for a list of flooring materials and the approved products for them.**



## 3100 & 3500 | Sheet Goods Adhesives

Spray-Lock 3100 and 3500 Sheet Goods Flooring Adhesives are ideal for time-sensitive sheet installations, especially in healthcare facilities. They allow for heat welding after 1 hour and immediate access to flooring after installation is complete. Typical sheet flooring installations using epoxies for heavy static/rolling loads require a cure time of 48-72 hours depending on the manufacturer. 3100 and 3500 expedite installation, allowing immediate patient room occupancy with no loss of revenue to the hospital. When installing in occupied spaces, 3100 and 3500 eliminate the need to shut down the HVAC or use fans to exhaust fumes from the building. Visit our website to find out which formula will work best with your flooring and substrate.

(SKU: IL-3100-22-UD & IL-3500-22-UD)

**8 lbs. MVER, 95% RH, 11pH**

**Coverage per single 22 oz can: 150 - 185 ft<sup>2</sup>**  
**Coverage per case of six cans: 900 - 1,110 ft<sup>2</sup>**



## 6100 | Carpet Pad Adhesive

Spray-Lock 6100 is an incredibly efficient method for installing carpet pad. Unlike trowel adhesives that require at least 24 hours of curing, you can begin installing carpet over pads. For double-stick applications, saving a day during installation is invaluable. Like all of our adhesives, 6100 is ideal for use in occupied spaces as it eliminates the need to shut down the HVAC or use fans to exhaust fumes from the building.

(SKU: IL-6100-22-UD)

**8 lbs. MVER, 95% RH, 11pH**

**Coverage per single 22 oz can: 150 - 185 ft<sup>2</sup>**  
**Coverage per case of six cans: 900 - 1,110 ft<sup>2</sup>**



# 6200 | Carpet Tile Adhesive



Spray-Lock 6200 is a revolutionary flooring adhesive designed for approved carpet tiles. It greatly reduces install time and allows spaces to be opened to traffic immediately after installation. While providing an excellent bond, the releasability of 6200 makes carpet tile replacement a fast repair job. Also, there is no adhesive contamination on the reclaimed flooring, making 6200 one of the only adhesives that allows for recycling of old discarded flooring.

(SKU: IL-6200-22-UD)

**8 lbs. MVER, 95% RH, 11pH**

**Coverage per single 22 oz can: 150 - 185 ft<sup>2</sup>**  
**Coverage per case of six cans: 900 - 1,110 ft<sup>2</sup>**



# 6500 | LVT Flooring Adhesive



Spray-Lock 6500 is designed for luxury vinyl planks and tiles (LVT) and has been installed and warranted for hundreds of millions of square feet. LVT is quickly becoming the fastest growing flooring option in both commercial and residential installations due to its low cost, durability and variety of designs. 6500 increases those benefits by reducing overall cost per square foot and keeping projects ahead of schedule by allowing immediate traffic. Some national retailers have been able to reduce their construction schedule solely based on the benefits and productivity of 6500.

(SKU: IL-6500-22-UD)

**8 lbs. MVER, 95% RH, 11pH**

**Coverage per single 22 oz can: 150 - 185 ft<sup>2</sup>**  
**Coverage per case of six cans: 900 - 1,110 ft<sup>2</sup>**



# 9500 | VCT Flooring Adhesive



Spray-Lock 9500 takes productivity to a new level for vinyl composite tile (VCT). It is at least 30% faster in adhesive applications and has a much lower profile when compared to trowel adhesives. Like LVT, VCT is a popular commercial flooring option that is attractive and affordable. Installers can eliminate the costly process of waiting for adhesive to set up by relying on 9500's short tack time and longer working time. As soon as installation is complete, floors can be waxed, finished and opened to all traffic.

(SKU: IL-9500-22-UD)

**8 lbs. MVER, 95% RH, 11pH**

**Coverage per single 22 oz can: 170 - 200 ft<sup>2</sup>**  
**Coverage per case of six cans: 1,020 - 1,200 ft<sup>2</sup>**



# 6500 Platinum | LVT Flooring Adhesive



Spray-Lock 6500 Platinum has been leading the industry for over 10 years as a high moisture and pH tolerant adhesive for luxury vinyl planks and tiles (LVT), and it is the most cost effective on the market. 6500 Platinum has taken one national account's moisture failure rate of 23% down to less than 1% over a span of 300 million square feet. Whatever the cause for excessive moisture in subfloors, 6500 Platinum is a time-saving and reliable solution for fast track installation.

(SKU: IL-6500P-22-UD)

**10 lbs. MVER, 98% RH, 12pH**

**Coverage per single 22 oz can: 125 ft<sup>2</sup>**

**Coverage per case of six cans: 600 - 750 ft<sup>2</sup>**



# 9500 Platinum | VCT Flooring Adhesive

Spray-Lock 9500 Platinum is our warranted solution for installing VCT in high moisture environments, as well as the most cost effective. Unlike bucket adhesives that are loaded with low moisture tolerant fillers, 9500 Platinum is formulated with only pure polymers. In addition to having Spray-Lock's reliably short tack time and long working time, 9500 Platinum is the safeguard against failed VCT installations due to high moisture issues. Additionally, 9500 Platinum's low profile provides a moisture tolerant floor with a finish as smooth as the substrate.

(SKU: IL-9500P-22-UD)

**10 lbs. MVER, 98% RH, 12pH**

**Coverage per single 22 oz can: 170 - 190 ft<sup>2</sup>**

**Coverage per case of six cans: 1,020 - 1,200 ft<sup>2</sup>**



# ESD 1005 | Conductive Spray Adhesive

Engineered to enhance the floor's ability to bring static charges safely to ground, Spray-Lock ESD 1005 provides major time savings compared to traditional ESD epoxy adhesive applications. In fact, it is so advanced, it provides a safe path to ground while using 80% less adhesive and offering superior protection against sub-floor moisture and pH. ESD 1005 is recommended for Electronic Manufacturing, Health Care, Mission Control, IT Equipment and Computer Server Rooms, with additional applications growing steadily.

(SKU: IL-ESD-1005-22-UD)

**7 lbs. MVER, 85% RH, 11pH**

**Coverage per single 22 oz can: 100 ft<sup>2</sup>**

**Coverage per case of six cans: 600 ft<sup>2</sup>**







# FRP Adhesive

Spray-Lock FRP Adhesive is changing the rules when installing wall panels, including fiberglass-reinforced panels (FRP), non-fiberglass-reinforced panels (NFP), Kydex, Acrovyn, plastic and composite. With FRP Adhesive's 4-hour working time, installers can spray the area and get to work, typically installing 30% more sheets a day than with other adhesives. FRP Adhesive can be applied to porous and non-porous substrates, has instant grab and can be used in occupied areas due to its low odor. It has a proven track record of over 19 million ft<sup>2</sup> of installation.

(SKU: IL-FRP-22)

**Coverage per single 22 oz can: 70 ft<sup>2</sup> (2 sheets - 8'x4')**

**Coverage per case of six cans: 420 ft<sup>2</sup>**



# Wall Tile Adhesive

Spray-Lock Wall Tile Adhesive (WTA) is an innovative application that cuts install time by over 50%. With WTA, there are no more sagging tiles or the need for a ledger board when working around a design, and tile can be installed over porous or non-porous substrates. Grouting can begin within 1 hour of the application giving installers the flexibility to finish a backsplash or wall tile installation in only 1 day, rather than coming back 24 hours later to grout as required by traditional methods. WTA also eliminates messy grout lines, which allows for an easier and quicker clean up. It will work on tiles up to 6"x6" and all mosaic tiles on a backing. WTA is approved by The Tile Council of North America for use in shower applications.

(SKU: IL-WTA-22)

**Coverage per single 22 oz can: 40 - 50 ft<sup>2</sup>**

**Coverage per case of six cans: 240 - 300 ft<sup>2</sup>**



# RugLock

Spray-Lock's RugLock is a permanent spray-on non-slip rug backing that firmly holds rugs in place to interior surfaces including hardwood, hard tiles, vinyl flooring and carpet. According to the National Safety Council, falls are the leading type of unintentional home-related injury deaths. With the introduction of RugLock, Spray-Lock has entered the consumer market with a real-world solution to a common household problem.

(SKU: IL-RUGLOCK-16 & IL-RUGLOCK-10)

**Coverage per single 16 oz can: 25 - 50 ft<sup>2</sup>**

**Coverage per case of six cans: 150 - 300 ft<sup>2</sup>**

**Coverage per single 10 oz can: 15 - 30 ft<sup>2</sup>**

**Coverage per case of six cans: 90 - 180 ft<sup>2</sup>**



# PRODUCT BENEFITS

---

3100, 3500, 6100, 6200, 6500, 6500P, 9500, 9500P, ESD 1005

---



## **ALLOWS IMMEDIATE ACCESS TO ALL TRAFFIC**

With a 3-4 hour working time, all foot and trade traffic can access the floor immediately due to the instant shear strength.



## **NO NEED TO SHUT DOWN HVAC**

Our non-toxic adhesives eliminate the need to shut down HVAC when installing in occupied spaces.



## **WAX/FINISH FLOOR IMMEDIATELY**

Floors can be waxed and finished immediately after installation.



## **ELIMINATES TROWEL MARKS**

Our adhesives leave no marks like trowel-applied adhesives.



## **NO INDENTATION**

Our products use 80% less adhesive, therefore eliminating adhesive indentation and displacement.



## **HEAT WELD IN 1 HOUR**

Heat welding of sheet vinyl can be done one hour after installing flooring, compared to the minimum of 24 hours conventional adhesives require.



## **NO HARMFUL CHEMICALS OR OFFENSIVE ODORS**

There are no harmful fumes that require fans to exhaust from buildings.



## **HIGH MOISTURE & PH TOLERANCE**

Our standard product line withstands elevated levels up to 8 lbs. MVER, 95% RH and 11 pH, and our Platinum line withstands up to 10 lbs. MVER, 98% RH and 12 pH.



## **ECO-FRIENDLY FORMULAS**

Our adhesives contain 0.0 g/mL VOCs (Volatile Organic Compounds), remove the need for solvents, are releasable and allow flooring to be re-used or recycled.

# COMMERCIAL & RETAIL

---

## FASTER INSTALLATION AND IMMEDIATE ACCESS

---



Fast-track construction has become the standard in the commercial and retail building process as an efficient way to save time and money. Spray-Lock Adhesives can be used in occupied spaces and allow all traffic immediately, thus they are quickly becoming the preferred option for retailers seeking to open new stores and turn remodels around in record time.

Spray-Lock's instant shear strength allows for all traffic without any adhesive indentation, displacement or movement associated with heavy weight-bearing loads. Floors can be waxed and finished immediately, and within an hour of installation, racks and displays can be moved onto the newly-installed flooring. Spray-Lock Adhesives use an advanced spray technology, therefore installations are done much quicker than traditional trowel methods.

Installers have switched to Spray-Lock products not only because they're faster and easier, but also because they're compatible with many different products and market segments. Flooring companies gain the versatility and flexibility needed to do jobs quickly. Spray-Lock formulas are also non-toxic and low odor, so during remodels, retailers can actually install new or replacement flooring in sections while remaining open to customers.

Floors can be waxed and finished immediately, and within an hour of installation, racks and displays can be moved onto the newly-installed flooring.

Spray-Lock Adhesives stand above the competition with a standard flooring line that withstands elevated moisture content of 8 lbs. MVER and 95% RH, with an 11 pH tolerance. For higher coverage, our Platinum line withstands up to 10 lbs. MVER, 98% RH and 12 pH. That's why Spray-Lock is becoming the preferred solution to moisture problems in retail and commercial flooring across the United States.

# HEALTHCARE

MILLIONS OF SQ. FT. OF PROVEN HEALTHCARE FLOORING SOLUTIONS



Installing flooring in healthcare facilities can be difficult and time-consuming, relocating patients and resources in the process. Spray-Lock makes the only adhesives with sufficient shear strength to allow hospital beds and room occupancy immediately after installation. A

healthcare facility can actually gain 2 billable days by using Spray-Lock Premium Eco Adhesives.

Spray-Lock makes the only adhesives with sufficient shear strength to allow hospital beds and room occupancy immediately after installation.

Epoxy installations typically require at least 36-72 hours from job start to room accessibility. In less than 30 minutes, Spray-Lock Adhesives are dry to the touch and ready for installation, with a 3-4 hour working time once the adhesive has tacked. In addition to quick set up and

shorter working times, Spray-Lock Adhesives also allow installers to heat weld sheet vinyl just 1 hour after installation is complete. Conventional adhesives, on the other hand, require a minimum of 24 hours set up time before heat welding.

Another benefit to using Spray-Lock products is that their low odor, 0.0 g/mL VOCs formulas do not atomize into the air. When installing in or next to occupied spaces, there is no need to shut down HVAC or move patients, increasing productivity for hospitals operating while under renovations.

Spray-Lock Adhesives also replace the need to seal high moisture concrete. With our excellent 5-year warranty offering the highest moisture tolerance coverage on the market, flooring installations can start much sooner without additional moisture mitigation expenses.



# HEALTHCARE

## GROWING LIST OF COMPLETED PROJECTS



- Abbott Northwestern Hospital
- Adventist Medical Center
- Alta Bates Patient Pavilion
- Baptist Hospital-Miami
- Barrow Hospital
- Battle Mountain Hospital
- Cancer Treatment Center of America
- Central WA Hospital
- Chelsea Hospital
- Cleveland Clinic
- Community Hospital of Fresno
- Corners Children's Hospital
- DMC
- Eastside Medical Center
- El Camino Hospital
- Elmhurst Hospital
- Emanuel Hospital-Salem and Mt. Hood
- Emory Hospital
- Erlanger Hospital
- Fillmore County Hospital
- Florida Hospital Wellness Center
- Fred Hutchinson Cancer Research Center
- Fulton County Hospital
- Gary Fenway Hospital
- Good Samaritan Hospital
- Grady Hospital
- Grey's Harbor Hospital
- Group Health System
- Gwinnett Medical Center
- Harrison Hospital
- Health South Plano Rehabilitation Hospital
- Highline Medical Center
- Hoag Hospital
- Huron Valley-Sinai
- Inspiro Health & Wellness
- Jennie M. Melham Memorial Hospital
- JFK Hospital

- Jones Regional Medical Center
- Kaiser Permanente
- Kalispell Regional Medical Center
- Laredo Nursing & Rehabilitation
- Las Colinas Medical Center
- Lone Peak Hospital
- M D Anderson Hospital
- Memorial Hermann Texas
- Memorial Hospital Chattanooga
- Mercy Hospital
- Mercy Imaging & Oncology
- Mountain View Hospital
- Nationwide Children's Hospital
- North Fulton Hospital
- North West Hospital
- Northside Women's Hospital
- Ohio State University Medical Center
- OHSU Hospital
- Parkland Hospital
- Piedmont Fayette Hospital
- Piedmont Mountainside Hospital
- Poplar Bluff Regional Medical Center
- Presbyterian Hospital
- Providence Everett Medical Center
- Providence Hood
- Providence Hospital Anchorage
- Providence Hospital Portland
- Providence Hospital Everett
- Reliant Dallas Rehab Hospital
- Reliant Hospital Mid-Cities
- Ridgeway Medical Center
- Rockdale Medical Center
- Samaritan Hospital
- Skagit Valley Medical Center
- Southern Regional Medical Center
- Southwestern Regional Medical Center
- St. Anthony Hospital

- St. Charles Medical Center
- St. Clair Hospital Federal Way
- St. Clair Hospital Tacoma
- St. Francis Hospital
- St. Joe's Hospital
- St. Luke's Hospital
- St. Mary's Missoula
- St. Mary's Haunstein
- St. Mary's Hospital Saginaw
- St. Mary's Medical Center Reno
- Southern Regional Medical Center
- Spalding Regional Medical Center
- Stanford University Medical Center Clinic
- Stone Springs Medical Center
- Summa Hospital
- Sutter General Hospital
- Swedish Hospital Seattle
- Swedish Hospital Issaquah
- Tanner Medical Center
- Terrell State Hospital
- Texas Health Harris Methodist Hospital
- The Toledo Hospital
- Toledo Clinic
- UC Davis Medical Center
- University of Cincinnati Hospital
- UPMC
- University of Toledo Medical Center
- VA Pittsburgh Healthcare System – Highland
- Vermillion Housing District Long Term Care
- Walla Walla VA Hospital
- Wellstar Hospitals-Austell, Dallas, Douglasville, Marietta
- Wheeling Hospital
- Woodland Healthcare
- Yakima Regional Medical Center

# HOSPITALITY

---

## INNOVATIVE SOLUTIONS FOR FAST-TRACK REMODELS

---



Spray-Lock Premium Eco Adhesives offer innovative solutions for all resilient flooring, and wall panel and tile projects in restaurants and hotels. Time is money during remodels. With Spray-Lock Adhesives, a hotel room or restaurant floor can be turned around in just a few hours. Our flooring products tack quickly and provide a 3-4 hour working time, with instant shear strength that allows traffic immediately after installation. Guests can occupy the space as soon as furnishings are set. Spray-Lock's FRP Adhesive and WTA provide releasability and long working times that allow installers to reposition tile and panels as needed, without stopping to spread glue.

Tiles and panels can be replaced in hotels and restaurants without inconveniencing guests, and room revenue in non-remodel areas will not be impacted.

Another benefit to Spray-Lock Adhesives is their low VOC content. When using our wall and flooring products, there are no offensive odors and no need to shut down HVAC. Tiles and panels can be replaced in hotels and restaurants without inconveniencing guests, and room revenue in non-remodel areas will not be impacted.

Unlike epoxy adhesives, Spray-Lock Adhesives are releasable at the end of flooring life, making carpet tile, vinyl plank and vinyl tile reusable and recyclable. Less scraping, less mess and faster turnaround during construction means less negative impact on the overall guest experience, as well as on the environment.

# INDUSTRY PROVEN

OVER HALF A BILLION SQ. FT. OF SUCCESSFUL FLOORING SOLUTIONS



Spray-Lock Premium Eco Adhesives have become the preferred flooring solution of major retailers throughout North America. Using Spray-Lock Adhesives solves moisture and high pH issues, reduces labor costs, and allows occupation of spaces faster than any other flooring adhesive.



VISIT [WWW.SPRAYLOCK.COM](http://WWW.SPRAYLOCK.COM) FOR A GROWING LIST OF TESTED AND APPROVED FLOORING PRODUCTS



# ENVIRONMENTAL IMPACT

## REDUCE, REUSE, AND RECYCLE FOR A HEALTHIER PLANET



### REDUCE


Spray-Lock's unique spray-applied technology reduces the environmental impact of adhesives in many ways. One primary way is by spraying instead of troweling adhesive, which can reduce consumption up to 80%. Also, we use water instead of solvents to deliver our polymers, eliminating cancer-causing chemicals emitted during drying and curing.

### REUSE

Our adhesives are designed to be releasable at the end of flooring life, allowing for the reuse of flooring such as carpet tile, vinyl plank or vinyl tile. We are also committed to reuse during manufacturing, and any materials that cannot be reused are recycled.

### RECYCLE

Spray-Lock also promotes recycling, allowing you to divert used flooring from landfills and direct them to recycling facilities. Additionally, all our products are packaged in recyclable aluminum cans and shipped in post-consumer recycled boxes.

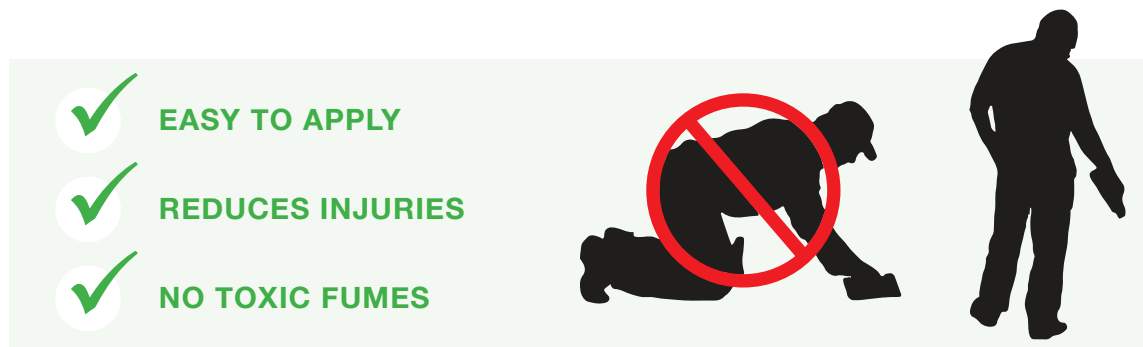

PROUDLY MANUFACTURED IN CHATSWORTH, GA, USA.



# LEED® V4 SUMMARY

---

## TECHNOLOGY THAT OFFERS 80% CONSERVATION OF ADHESIVE CONSUMPTION AND PROMOTES HEALTHY INDOOR AIR QUALITY

---

### CDPH STANDARD METHOD V1.1-2010 COMPLIANT

All Spray-Lock Adhesives contribute to LEED® v4 Indoor Environmental Quality – Low-Emitting Materials credit and are compliant in accordance with California Department of Public Health CDPH/EHLB Standard Method v1.1-2010 for school classrooms, private offices and single-family residence parameters when modeled as flooring.

Our adhesives also conform to the South Coast Air Quality Management District's SCAQMD Rule 1168 – Adhesives and Sealants (January 2005), as well as the Hong Kong Air Pollution Control (VOC) Regulation.

### INDOOR ENVIRONMENTAL AIR QUALITY – LOW-EMITTING MATERIALS

Spray-Lock Adhesives contribute to this credit for the following rating systems:

- New Construction
- Commercial Interiors
- Schools
- Retail
- Healthcare
- Hospitality
- Data Centers
- Warehouses & Distribution Centers



## SUSTAINABILITY & USAGE

---

### CASE STUDIES SHOWING THE REDUCED ENVIRONMENTAL IMPACT

---

#### WALMART

**300,000,000 FT<sup>2</sup>**

By using Spray-Lock Eco Adhesives, Walmart reduced its impact on the environment during 2006-2010 by the following amounts:

- 6,913,850 lbs. of glue
- 333,198 gallons of water
- 229.71 tons of CO<sub>2</sub>e greenhouse gases
- 149 truckloads off the highway

#### ELMHURST HOSPITAL

**250,000 FT<sup>2</sup>**

By using Spray-Lock 3500 Eco Adhesive, Elmhurst Hospital reduced its impact on the environment by the following amounts:

- 19,407 lbs. of glue
- 874 gallons of water
- About 1 ton of CO<sub>2</sub>e greenhouse gases

# ESD 1005 ADHESIVE

ENGINEERED TO ENHANCE SAFELY-GROUNDED STATIC CHARGES



**ELECTRONIC  
MANUFACTURING**



**HEALTHCARE**



**MISSION CONTROL**

Spray-Lock ESD 1005 reduces interference with static discharge by providing a safe path to ground with 80% less adhesive, unlike traditional ESD adhesive applications. Approved for both vinyl and carpet tile, this adhesive does not require any sealers for high moisture applications and is warranted to withstand elevated moisture levels of 7 lbs. MVER, 85% RH, and 11 pH. While maintaining electrical continuity between all ESD tiles, ESD 1005's water-based formula is easy to clean and releasable, expediting both installations and flooring replacement jobs.



## ADHERES TO PROPERLY PREPARED


ESD Vinyl Tile, ESD Sheet Vinyl, ESD Carpet Tile,  
and other ESD Flooring materials

## PROPERLY PREPARED SUITABLE SUBSTRATES

Concrete, Underlayment Grade Plywood, Metal,  
Existing ESD Vinyl Tile, Raised Access Panels, and Epoxy

## TEST RESULTS

ESD Flooring Systems, applied with ESD 1005, were tested according to ANSI ESD S 7.1 yielding a rating of "very conductive." At both Surface to Ground and Surface to Surface testing, our products rated at  $1.0 \times 10^5$  or better in an environmental relative humidity of both 50% and 12%. When tested according to ANSI/ESD S20.20 at RH of both 50% and 12% our products are in compliance with the standard when tested as a system with approved ESD vinyl tile and ESD carpet tile.

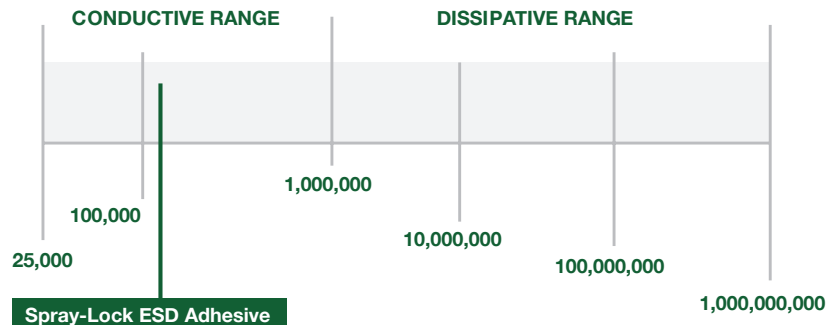

# FRP ADHESIVE

---

## INSTALL MORE FRP SHEETS WITH LONGER WORKING TIMES

---



Spray-Lock FRP Adhesive is the best option for installers looking for a lightweight spray adhesive with the longest working time on the market. Instead of constantly applying adhesive to the back of panels, installers can spray out the work area and immediately focus on sheet installation — typically installing 30% more sheets a day, eliminating panels from sagging and saving valuable time. Offering a low profile that adheres to both porous and non-porous surfaces, FRP Adhesive is versatile enough for nearly all types of panels and substrates. Each can covers a minimum of 70 ft<sup>2</sup> or two sheets (8'x4' panels). Instead of troweling out a 45 lb. bucket of traditional FRP adhesive, you can spray 5 lbs. of Spray-Lock's directly on the substrate.



### 4 HOUR WORKING TIME - INCREASES PRODUCTIVITY

Installers can spray out the work area and then focus on sheet installation without stopping to spread glue, allowing more FRP sheets to be installed.



### INSTANT GRAB - NO BRACING REQUIRED

Immediate shear strength eliminates sagging, shifting, and bracing during installation. No need for mechanical anchors and no need to prop panels.



### CONSERVES MATERIALS

Three cans of FRP Adhesive, weighing a total of 5 lbs., provide the same coverage as a 3.5 gallon, 45 lb. bucket of trowel-based adhesive. Lifting 40 lbs. less saves installers time and energy, and uses smaller truckloads.



---

### APPROVED PANELS

NRP, FRP, Kydex, Acrovyn and Plastic and Composite Wall Panels

### ADHERES TO PROPERLY PREPARED

#### Porous Substrates:

Plywood, Drywall, DensShield and Water Resistant Drywall and more

#### Non-Porous Substrates:

Metal, Steel, FRP, PVC, Paint, Ceramic Tile, High Press Laminate and more

---

# RUGLOCK

**A PERMANENT SOLUTION TO STOP RUGS FROM SLIPPING**



There are some trips you don't want to take, and RugLock is here to make sure your household rugs are no longer at risk of sending you on one. RugLock is a spray-on solution that does what rug pads, tape and traditional adhesives cannot by creating a permanent non-slip rug backing that grips to all floors in your home without damaging surfaces. Treated rugs can be easily peeled up and repositioned. Compared to rug pads, RugLock is lower in cost per square foot and can be used on all sized rugs without unsightly pads sticking out. RugLock is also ecofriendly, water-based, non-toxic and made in the USA, making it the best option for environmentally conscious consumers.



**NON-TOXIC  
LOW ODOR**

With 0.0 g/mL VOCs (Volatile Organic Compounds), RugLock is a non-toxic, water-based formula, so it's safe to use inside your home and doesn't have a harsh odor.



**NO DAMAGE  
TO FLOOR**

Worried about damage to your hardwood floors? Don't be. RugLock has no harmful chemicals, so it won't ruin your floors. If RugLock transfers to the floor, it can be rubbed off by hand or with a damp cloth, leaving no sticky residue.



**EASY TO  
USE**

Applying RugLock is as easy as 1-2-3, or in our case, Prep, Spray and Lock. Unlike other methods, there's no need to cut for size, so you only use what you need, eliminating wasted product.



# RUGLOCK

## HOW TO USE



### STEP 1: PREP

Open drop cloth in an area away from obstructions. Place rug upside down in the center of the drop cloth, leaving plenty of room along edges. Remove all lint and dirt from back of rug to ensure effective bond. A lint roller is recommended. Use painter's tape along the edges to protect the front and any fringe from overspray. If overspray occurs, remove with damp cloth immediately.



### STEP 2: SPRAY

Shake can well. Gently snap off trigger safety tab. Hold can at knee height (approximately 18-20 inches away). Spray from left to right in a sweeping motion. Evenly work your way down the rug, letting product fall onto rug back like snow. Let RugLock dry completely indoors, for 8-12 hours.



### STEP 3: LOCK

Remove tape from edge, and place rug as desired on clean surface. Apply pressure to lock the rug into place. If backing loses grip over time, simply wipe with a damp cloth, let dry and the tack will return. If RugLock transfers to floor, the residue can be rubbed off by hand or with a damp cloth.



“ I have tried every type of non-slip pad, tape, etc. None have worked - only helped or left a residue. Frustrated I decided to give RugLock a try. It is fantastic. I have nothing but good things to say about it! ”

For more information, visit

[WWW.RUGLOCK.COM](http://WWW.RUGLOCK.COM)

# WALL TILE ADHESIVE

---

## GROUTING IN 1 HOUR MEANS FASTER INSTALLATION

---



As one of the most innovative developments in wall tile installations, Spray-Lock WTA (Wall Tile Adhesive) is a time-saving and easy-to-use spray unlike any other tile adhesive. It eliminates sagging and the need for shims, spacers and ledger boards, and WTA can be installed over porous or non-porous substrates. There is no need for mixing and troweling, and it is easy to clean up. The biggest advantage to using WTA is the ability to grout within 1 hour of the adhesive application. Also, its low profile makes it ideal for glass and stone mosaic installations. Approved for use on tiles up to 6"x6" and mosaics on a backing, WTA is the best option for nearly all wall tile installs.



### **FASTER INSTALLATION**

Spray entire wall and set tile within minutes.



### **ELIMINATES SAGGING AND TILE MOVEMENT**

No need for spacers, ledgers or nails since once the adhesive has tacked up, there is absolutely no slipping.



### **NO THINSET OR MASTIC IN GROUT LINES**

Due to a thinner bed of adhesive, there is no buildup or bleed through of thinset or mastic into grout lines, which is especially important for glass and stone tile.



---

### **FOR USE WITH**

Glass Tile, Mosaics, Porcelain, Ceramic Tile, Marble, Granite, Travertine and Thin Porcelain 4x8 Sheets

### **ADHERES TO PROPERLY PREPARED**

Water Resistant Drywall, Hardie Board, Green Board, DensShield, Fiberglass, Plywood, Primed Sheet Rock, Metal, Glass, Existing Wall Tile and more

---

# WARRANTIES

---

## 5-YEAR WARRANTIES ON OVER 600+ FLOORING PRODUCTS

---



Our warranties cover over 600 flooring products, not only for material but also labor. These warranties are effective only in the contiguous United States, Alaska & Hawaii.

- Standard Warranty: 8 lbs. MVER, 95% RH, 11 pH
  - Platinum Warranty: 10 lbs. MVER, 98% RH, 12 pH
- 10-year warranties are also available on a job-specific basis. For more information, contact Technical Services at 423-305-6151 or visit [www.spraylock.com](http://www.spraylock.com).

# TECHNICAL SUPPORT

---

## OFFERING UNSURPASSED TECHNICAL SUPPORT

---

Along with the most advanced adhesive technology in the resilient flooring industry, Spray-Lock provides technical support that is second to none. Our team of Technical Services experts will work closely with you to ensure your team is equipped to handle any situation that may present itself. From simply being able to explain features and benefits, to breaking down complex characteristics of the adhesive's performance, it is our goal to ensure you fully understand everything that sets Spray-Lock Adhesives apart from the competition.



## PARTNERED TO PROVIDE EDUCATION TO OUR CUSTOMERS

---

Spray-Lock has partnered with AIA (The American Institute of Architects) to provide quality education. AIA advocates at the national, state, and local levels to support AIA members in mastering new knowledge and skills to meet the changing requirements of their profession. They help their members stay connected with other local professionals and keep them informed about local, state, and national issues. Spray-Lock is an AIA Passport Provider authorized to conduct face-to-face and distance learning courses nationally and internationally offering Spray-Lock branded content.

---

For more information or to find out which formula is best for your flooring and substrate, visit

[WWW.SPRAYLOCK.COM](http://WWW.SPRAYLOCK.COM)

---



5959 Shallowford Rd. Suite 405, Chattanooga, TN 37421  
P: 423.305.6151 | F: 423.305.6150 | [www.spraylock.com](http://www.spraylock.com)

SKU: PRDCTLG  
Date: 5.25.17  
REV: I