



Spray-Lock[®]

PREMIUM ECO ADHESIVES

Saving the
flooring industry
time and money

Used for: LVT • VCT • Sheet Goods • Rubber • Carpet Pad / Tile • Wall Tile / FRP

Proven Technology

Changing the Construction Industry

Our Mission

To develop and promote water-based aerosol technologies that reduce adhesive consumption by 80%, while saving time and money.

Our Technology

Spray-Lock® manufactures and distributes 0.020 g/ml VOC Premium Eco Adhesives for floor and wall applications. Spray-Lock® products increase productivity and greatly improve indoor air quality compared to using trowel adhesives, delivering immediate access and cost savings.



Table of Contents

Proven Technology	1
Mature Technology	3
Industry Proven	5
Health Care	7
Commercial & Retail	9
Hospitality	11
FRP Adhesive	13
Wall Tile Adhesive	15
ESD Adhesive	17
RugLock	19
LEED Point Summary	21
Sustainability Report	22
Environmental Impact	23
Product Catalog	25



Spray-Lock® benefits include:

- Immediate Access to All Traffic
- 3-4 Hour Working Time*
- No HVAC Shutdown
- Wax/Finish Floor Immediately
- Eliminates the need for epoxies for heavy static and rolling loads
- High Moisture and pH Tolerance
Standard: 8 lbs, 90% RH, 11pH
Platinum: 10 lbs, 93% RH, 12 pH
- No Trowel Marks
- Heat Weld in 1 Hour
- No Offensive Odors

Promotes Healthy and Sustainable Environment

- 0.020 g/ml VOC
- Uses 80% Less Adhesive
- Removes Need for Solvents
- Releasable - Allows Flooring Re-use and Recycling
- Recyclable Packaging
- No Manufacturing Waste
- Reduces Work-Related Injuries

* Based on flooring adhesives

5 year
warranty

Warranting over 400
flooring products
& growing daily.

Mature Technology

Proven since 1997

Spray-Lock® Timeline

1997

Spray-Lock® Premium Eco Adhesives technology first entered the marketplace.

2000

Mohawk began using Spray-Lock® Adhesives to apply carpet tile.

2004

Walmart's 300 million ft² program specifying use of Spray-Lock® Platinum 6500 Adhesive in LVT application.

2006

Began private labeling for multiple flooring manufacturers.

2007

Expanded to flooring companies in Australia, New Zealand, United Kingdom, Japan, and Germany.

2008

Spray-Lock® began selling direct.

2009

Spray-Lock® became ISO certified.

2011

Began national distribution.


2013

Spray-Lock® Adhesives are now used in more than 19 countries and represented by distribution throughout the United States.

Spray-Lock's® reputation for solving moisture problems and meeting fast-track building schedules has changed the construction industry. Major companies across the United States have turned to Spray-Lock's® proven flooring solutions. Spray-Lock® has stood the test of time, achieving record-breaking installation numbers.



U.S. Distribution

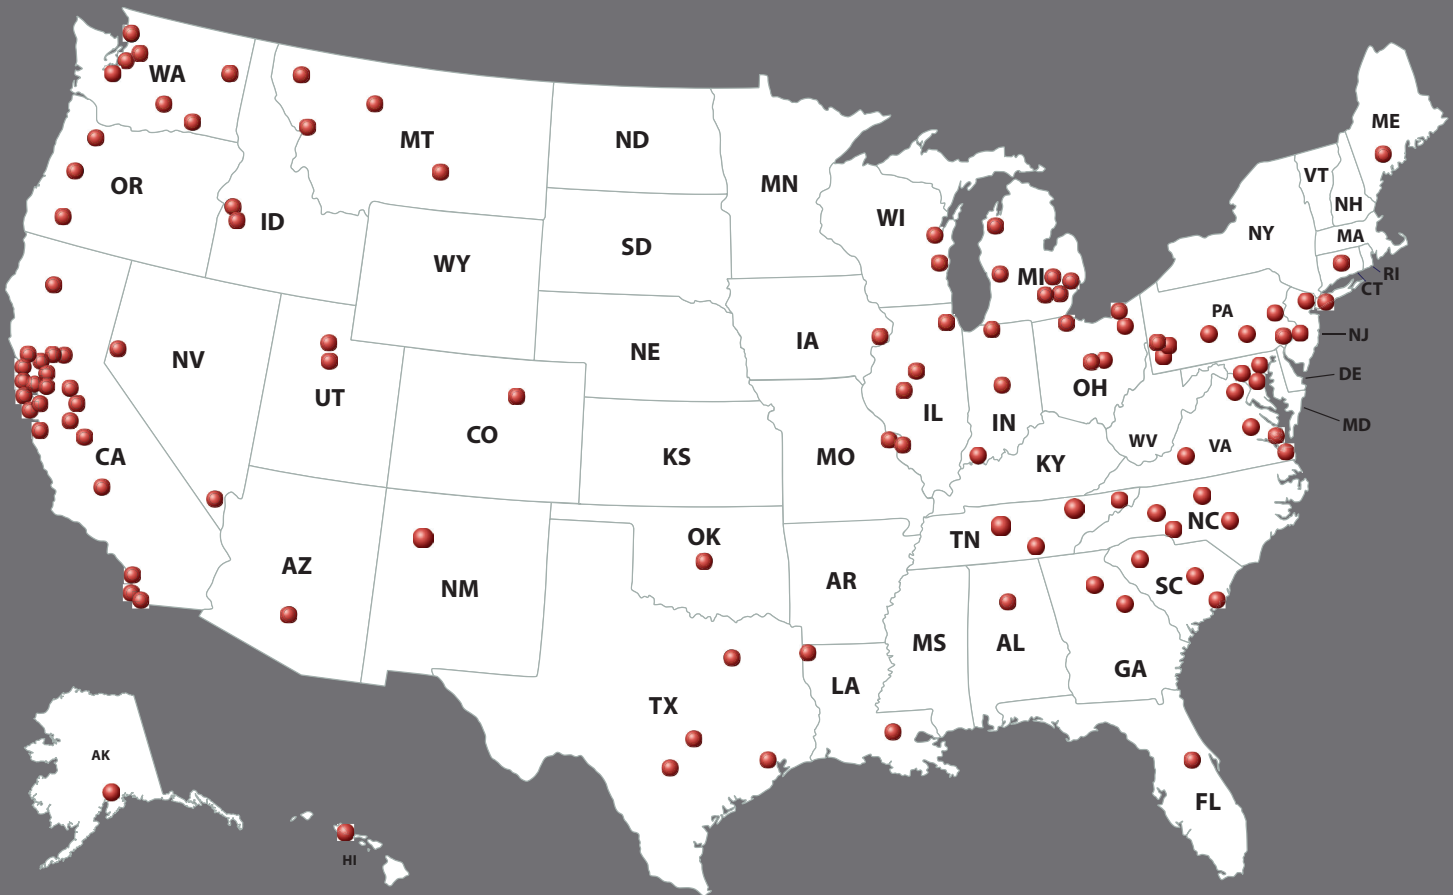

To locate a distributor near you,
please refer to our website:

www.spraylock.com

Industry Proven - Time Tested Over 1/2 billion sq.ft. of Successful Flooring Solutions Worldwide!

These are just a few of the companies that have selected Spray-Lock® Adhesives to solve installation and moisture problems, high pH issues, reduce labor costs, and occupy space faster.



Growing List of Flooring Approvals



Growing list of Spray-Lock[®] approved flooring.
5 year warranty on over 1/2 billion sq.ft. of flooring.



And many more!

AdoreBasic6500AdorePlanks6500AlliedLVT6500AltroAquarius3100AltroCSLine3100AltroDesigner253100AltroDolce3100AltroEthosComfort3500AltroImpressionist3100AltroMaxis3100AltroQuartzChip9500AltroQuartzTile3100Altro-SafetyFloorsSuprema3100AltroSmoothEthos3100AltroStronghold3100AltroSuprema3100AltroTimbersafe3100AltroWalkway3100AmericanBlitrteMarathonOasis3100AmericanBlitrteMirraTile6500AmicoAmico6500AmicoSpacia6500AmicoStria6500ArmstrongAbode3100ArmstrongAccoladePlus3100ArmstrongAlterna6500ArmstrongConnectionCorlon3100ArmstrongCorlon3500ArmstrongDualityPremium-Plus3100ArmstrongExcelon9500ArmstrongLVTPlank6500ArmstrongMeditech3500ArmstrongMeditechTandem3500ArmstrongMeditone3500ArmstrongMedley3100ArmstrongMigrations9500ArmstrongNaturalCreations6500ArmstrongNatur-alityPersonalities6500ArmstrongPossibilitiesPetitPoint3100ArmstrongRaffia9500ArmstrongRejuvenation3500ArmstrongStratamax3500ArmstrongTimberline3500ArtistekForestwood6500ArtistekNewBarnwood6500AzrockAzterra9500Az-rockColourEssence9500AzrockColourEssenceSR9500AzrockCortinaColors9500AzrockCortinaGrande9500BeaulieuBlissAvenues6500BeaulieuBlissPicturesque6500BeaulieuLSIClovelly6500BentleyPrinceStreetCarpetTile6200Bolyu-Founder26200BolyuNexterraBack6200BurkeEndura4100CabanaCivicDRDomestic6500CentivaContour6500CentivaEventPlank6500CentivaRay'sPlatinum6500CentivaLVPNature6500CentivaVictoryMagics6500CenturaDuraPlank6500Centura-DuraTile6500CenturaSaga26500ChilewichPlynl6500CongoleumAlternatives9500CongoleumChoices9500CongoleumCXSeries9500CongoleumEndurancePlank6500CongoleumFlooreverPlus3100ConstantineCarpetTile6500ConstantineSustil-ian6500CVGAntiFatigueUnderlay6200CVGCarpetTile6200CVGDominator6200CVGNaturesView6500DareaNovoFloorStandard3100DareaDominator3100DecoriaWoodPlanks6500DessoNeoCore6200DomoCarpetTile6500DuchateauAntique-WhiteLVT6500EarthwerksAvantelLVT6500EarthwerksBambooHorizontal6500EarthwerksBrazos6500EarthwerksCeramic6500EarthwerksDakotaPlank6500EarthwerksEasyworksLooseLayCollection6500EarthwerksGenesisPlank6500EarthwerksHathaway6500EarthwerksImpressions6500EarthwerksLancasterLVT6500EarthwerksLegacy6500EarthwerksLegacyCollection6500EarthwerksMeridian6500EarthwerksMontana6500EarthwerksPallisades6500EarthwerksPaviaStone6500E-arthwerksRapture6500E-TimelessDesign6500Earth-Classic6500EcoDomoEch-ryOak6500EstriteMir-HightractionTile6500Flex-lexcoWoodtones6500FI-tech3500FloorfolioWood-lyment6500Floorwork-6500FoamProductsCorp-mateSilencer6200Foam-boCoralDuo6500ForboEt-tile3100ForboEternalWood-Step3500FordonIntPatri-florAccord3500GerflorArti-ry-Tex3100GerflorElegance-florMipolamSym-tractWood3500GerflorNew-3100GerflorRecre-ation603500Ger-florTarabus2100Ger-Use3500GerflorTaraflex-DryTex3100GerflorTara-sionComfort3500Gerflo-Step6200GrandEn-a3mm6500GrandEntrance-X-it6500HallmarkEIDora-6500HarbingerHarbingerLV-FLOORConserve6500Inter-Flor6500InterfaceFLOR-6200InterfaceFLORgraflex-flor6200InterfaceFLOR-florGraphlar6200Interface-ile6200IVCBluePrin-6500J&JEKOback6500J&-e6200LammettBay-3500LGBioLife3500LG-life3500LGRexcourt3500LI-lAspenCollection6500Lodg-lLonbead3100LonsealLon-concin256k3100LonsealLoneco3100LonsealLonecoLinnen3100LonsealLonfoam3100LonsealLoffloorFlecks3100LonsealLoffloorGalvanised3100LonsealLoffloorPlain3100LonsealLoffloorVista3100LonsealLonmetro3100LonsealLon-pear3100LonsealLonplate3100LonsealLonplatePatina3100LonsealLonpointMoonwalk3100LonsealLonsealUnderlayment3100LonsealLonstage3100LonsealLonwaveMirage3100LonsealLonwoodMader3100LonsealLonwoodNatural3100LonsealLonwoodLonzebra3100LoppacherTransitPremium3500LoppacherEntranceMatting6500ManningtonAdura6500ManningtonAmicoCollection6500ManningtonAssurance3500ManningtonAssuranceSquared-6500ManningtonAudioSpectra4100ManningtonAxon3100ManningtonBenchmarkNorthcrest3100ManningtonClassic3100ManningtonColorFields4100ManningtonColorpoint3500ManningtonColorscape4100ManningtonColo-rspector-Sculptured4100ManningtonDesignerEssentials9500ManningtonEpic6500ManningtonEssentials9500ManningtonFineFields3500ManningtonGraffiti6500ManningtonInfinity6500ManningtonInfinityback6500ManningtonInsightPlus3100Man-ningtonJumpstartWoods3100ManningtonMagnaMultiFlec3100ManningtonNaturesPath6500ManningtonPrimo3500ManningtonProgressions9500ManningtonRelay3500ManningtonE-voive6200ManningtonRevolveback6500ManningtonSobellaDeluxe3100ManningtonSobellaOmniHD3100ManningtonSobellaPrime3100ManningtonSobellaSupreme3100ManningtonSolidpoint9500ManningtonVivendi3500MaslanArtesian-6500MaslanModular6500MatsIncBolonTile6500MatsIncDebonComfort(FeltBack)3100MatsIncDebonCompact3500MatsIncEnterprise6500MatsIncFloorworksPlank6500MatsIncNaturtile6500MatsIncSupremeNOP6200MaslorCommon-wealth6500MetroforSavannah6500MetroforSolidityLVT6500MillikenPerformanceLop6200MillikenShadowbox6200ModularityTilesModularityTiles6500MohawkNXTThermoplastic6500MohawkPVCICT6500MohawkStoneWalk9500Mo-hawkT-3back6500MohawkWalkoff6500MondoGeode4100MondoHarmoniLisseSmoothSheet4100MondoHarmoniSheet4100MondoHarmoniSmooth4100MondoHarmoniTile4100NACStrataflex3100NafcoPermaStone6500NationalSportsFloor-sAireSports3500NatuRelleBrazilianCherry6500NatuRelleCanadianMaple6500NatuRelleMarbleCarrara6500NextFloorDevelopment3100NovalisHartsfield6500NovalisLVT6500OscodaPlasticsProtectAll100ParterreFused6500Parterre-Fusedto6500ParterreHardCoreFresco6500ParterreIngrain6500ParterreRemedy3500PlaeBlackZebra6500PolyflorExpona6500PolyflorForestFX3500PolyflorPearlazzo3100PolyflorPolysafe3500PolyflorPURTile3100PolyflorUl-tra3100PolyflorPolysafeVogueUltraPUR3500ProsourceBPEmboss6500QuadrantModularAbstraction6200QuartzQuartzConcepts9500QuartzQuartzScapes9500QuietlockLVT Underlay6500RaskinIndustriesElevationsPlank6500RaskinIndustriesFormationsProdigy6500RBRubberZipTile 4100RCAFlexi-FloorRubberSheet 4100ResponsiveIndustriesZetaPegasus6500ResponsiveIndustriesZetaWoodEssence3500ResponsiveIndustriesZetaKong6500Re-wardLVT6500RoppeNorthCoast6500RoppeSafeTork3100RoppeRubberTile4100SathisStarDiamond9500ShawButlerTawneyOak3500ShawEcoLogicback6500ShawEcoWorx6500ShawEPBLBacking6500ShawExpose6200ShawIVC6500Shaw-Jeogori6500ShawNativeOrigins6500ShawUncommonGround6500SignatureSignaflex3100SolarbriteKeystone6500StaticworxEclipseSeriesRubberESD1005StaticworxESD1005StaticworxESD1005StaticworxESDVinylESD1005StaticworxE-ecoEcoQuand6500TajimaJazz3500TajimaMajestaWoods3500TajimaMedFloor3500TajimaPerformance703500TajimaSeuras3500TajimaXcel9500TajimaZodiac3500TAMurano3100Tandus&AEthosBack6500TandusConserveBackCarpetTI-le6500TandusER3back6500TandusEthosPVback6500TandusFieldDay6500TandusFlexAir6500TandusFlexAirback6200TandusPowerbondMedfloorsheet6500TeknoflorFireside3500TeknoflorForestScapes3100TeknoflorGranite3500Teknoflor-MountainScapes3500TeknoflorOakCollection3500TeknoflorNaturalCollectionHESheet3500TeknoflorTimberscapes3500TeknoflorWoodlandsPath6500TollIntesta9500TollMature3500TollViale9500TredmoreDublestick6100TufstufClassi-cut3500U SRubberQuietsound6500VeronaMezzo3100VPIConductile3100VPIPRTTile 6500WicandersCorkComfort6500WicandersVinylComfort6500WildernessAntiqueDark6500Winton TileLVT6500WoodlandPathLVT6500

**Over 400 products tested,
approved and covered
under Spray-Lock[®]
5 year warranty!**

See website for current list of approved
Spray-Lock[®] flooring.
www.spraylock.com

worksWoodAntique6500EarthwerksWood-elon3500EstriteAdvantis4100EstriteLux-ur6500EstriteTexasGranite3100Euro-Flex-coQuartz9500FlexcoSolidVinyl6500F-excoX-quisite6500FlexitechFlexi-Plank6500FloorMufflerUltraealUnde-rsLVT6500FoamProductsCorpDynathane-Silence6500FoamProductsCorpEco-Ulti-ProductsCorpSilencerLVT6500ForboFor-emaMarble3500ForboEternalStep-3500ForboFlotex6200ForboTraction-otJustice6200FrankPlankLVT6500Ger-ne6500GerflorCreationTile3100GerflorD-3500GerflorMipolamCosmo3100Ger-bioz3500GerflorNeraCon-PortEbene3100GerflorNubuckGrey-ation303500GerflorRecreation453500Ger-florSaga26500GerflorSymbol3100Ger-florTaraflex3100GerflorTaraflexMulti-SportMPlus6500GerflorTaraflexSportMP-layComfort3500GerflorTaralayImpres-riUniver75PU3100GrandEntranceDesign-tranceLVTWood6500GrandEntranceXa-ria5mm6500GTPInternationalIncFree-fdoLVT6500HallmarkSmockeyMountain-T6500HartexSuper40oz6100Interface-faceFLOREquilibrium6500InterfaceFLOR-Glasbac6200InterfaceFLORGlasbacRE-Backing6500InterfaceFLORHeugaSuper-Monochrome6200InterfaceFLORSuper-FLORSwing6500InterfaceFLORTatamiT-3500IVCtec3500IVCLegacyPlank-JEndorePlusBack6200KrausRoun-port6500LeesRealization6500LGGArtwalk-DecoWood6500LGGallant9500LGNature-montaSportPro3500LodgInternational-InternationalTahoeCollection6500Lonseal-coin3100LonsealLoncoin23100Lonseal-

Health Care - Millions of sq.ft. of Proven Solutions Saving Time & Money



Unique advantages in hospital remodels and new construction projects - saving time and money.

Immediate access with long working times:

3-4 hours working time. The only adhesive with sufficient shear strength to allow hospital beds and room occupancy immediately after installation.

No indentation-replaces epoxy:

Uses 80% less adhesive, eliminating adhesive indentation and displacement.

Heat weld same day:

Allows heat welding of sheet vinyl one hour after installing flooring. [Conventional adhesive calls for heat welding at a minimum of 24 hours after installation.]

No need to shut down the HVAC:

Spray-Lock® eliminates the need to shut down HVAC when installing in occupied spaces.

Product Benefits	Spray-Lock®	Conventional Trowel Adhesives
Allows foot traffic immediately	✓	✗
Allows trade traffic immediately	✓	✗
Allows hospital beds & room occupancy immediately	✓	✗
Heat weld in 1 hour	✓	✗
No offensive odors or harmful chemicals	✓	✗
Wax/finish floor immediately	✓	✗
High moisture & pH tolerance	✓	✗
No trowel marks	✓	✗
No epoxies needed under hospital beds	✓	✗
Supports reuse of flooring	✓	✗
Supports recycling of flooring	✓	✗
3 year shelf life	✓	✗

For Use With Approved: VCT • Carpet Tile • Vinyl Plank and Tile • Sheet Vinyl • Rubber

Adheres to Properly Prepared: Concrete • Underlayment Grade Plywood • Fiberglass • Metal • Existing VCT • Raised Access Panels

Minimum remodeling savings using Spray-Lock®:
= \$6,000 per room savings

* Based on Voluntary Hospital Association report of NET revenue of \$2,000 - \$4,000 per day.

High moisture & pH tolerance:

Withstands elevated moisture content of 8 lbs. MVER, 90% RH with an 11 pH tolerance for all Spray-Lock® formulas and a Platinum range up to 10 lbs. MVER, 93% RH, and a pH of 12.

Wax and finish floor immediately:

Wax and finish floors immediately after installation.

Eliminates trowel marks:

Spray-Lock® technology eliminates the need to trowel-apply adhesive.

80% less adhesive used:

The “greenest” adhesive on the market with 0.020 g/ml VOC content and 80% reduction of adhesive consumption.

Commercial, Retail and Hospitality

Faster Installation - Immediate Access



Meeting fast-track building schedules for:

- Retailers
- Medical facilities
- Commercial
- Schools
- Hotels
- Restaurants
- Office buildings
- Sports facilities
- Residential

Successfully solving moisture problems and meeting fast-track building schedules nationally. Over 300 million sq.ft. in Walmart stores.

Changing the industry:

Installers have switched to Spray-Lock® not only because it's faster and easier, but also because of its compatibility with many different products and market segments, giving flooring companies the versatility and flexibility they need to do jobs quickly.

Wax and finish floor immediately:

Wax and finish floors immediately after installation.

Allows all traffic immediately:

Spray-Lock's® instant shear strength allows for all traffic without any adhesive indentation, displacement or movement associated with heavy weight-bearing loads. All foot and trade traffic can access the floor immediately.

High moisture & pH tolerance:

Withstands elevated moisture content of 8 lbs. MVER, 90% RH with an 11 pH tolerance for all Spray-Lock® formulas and a Platinum range up to 10 lbs. MVER, 93% RH, and a pH of 12.

Product Benefits	Spray-Lock®	Conventional Trowel Adhesives
Allows foot traffic immediately	✓	✗
Allows trade traffic immediately	✓	✗
No offensive odors	✓	✗
Wax/finish floor immediately	✓	✗
High moisture and pH tolerance	✓	✗
Reduces trowel marks	✓	✗
3 year shelf life	✓	✗
Can install over non-porous substrate: (burnished concrete, existing VCT, metal)	✓	✗
0.020 g/ml VOC content	✓	✗

For Use With Approved: VCT • Carpet Tile • Vinyl Plank and Tile • Sheet Vinyl • Rubber

Adheres to Properly Prepared: Concrete • Underlayment Grade Plywood • Fiberglass • Metal • Existing VCT • Raised Access Panels

Over 1/2 billion sq.ft. of warranted flooring across North America.

Standard

Platinum

Standard

Platinum



- 8 lbs MVER
- 90% RH
- 11 pH



- 10 lbs MVER
- 93% RH
- 12 pH



- 8 lbs MVER
- 90% RH
- 11 pH



- 10 lbs MVER
- 93% RH
- 12 pH

Hospitality – Innovative Solutions for Fast-Track Remodels – Saving Time & Money



Spray-Lock® Eco Adhesives offer premium solutions for all resilient flooring for restaurants and hotels. Spray-Lock® also offers complete restaurant and hotel remodel solutions for FRP and Wall Tile. See more information on Wall Panel and Wall Tile Adhesive benefits on pages 13 and 15.



Minimizes loss of revenue during remodels:

3-4 hours working time. Wax and finish floor immediately. The only adhesive with sufficient shear strength to allow immediate placement of all room furnishings.

All guest and trade traffic can access floor immediately:

Guests can occupy rooms as soon as furnishings are set.

Easy clean up:

Adhesive can be removed with water while adhesive is still wet.

High moisture & pH tolerance:

Withstands elevated moisture content of 8 lbs. MVER, 90% RH with an 11 pH tolerance for all our adhesive formulas and a platinum range up to 10 lbs. MVER, 93% RH, and a pH of 12.

Reduces remodel time & cost:

Easily releasable at end of flooring life. This allows for reuse of flooring such as carpet tile, vinyl plank, or vinyl tile. Less scraping/Less mess and faster turnaround during construction means less negative impact on overall guest experience.

No offensive odors - No need to shut down HVAC:

Guests will not be inconvenienced and room revenue in non-remodel areas will not be impacted.

Product Benefits

Spray-Lock® Conventional Trowel Adhesives

Allows foot traffic immediately	✓	✗
Allows guest occupancy immediately	✓	✗
Replace guest room & restaurant furnishings immediately	✓	✗
Heat weld in 1 hour	✓	✗
No offensive odors or harmful chemicals	✓	✗
Wax/finish floor immediately	✓	✗
High moisture & pH tolerance	✓	✗
No trowel marks	✓	✗
No epoxies needed	✓	✗
Supports reuse of flooring	✓	✗
Supports recycling of flooring	✓	✗
3 year shelf life	✓	✗

For Use With Approved: VCT • Carpet Tile • Vinyl Plank and Tile • Sheet Vinyl • Rubber

Adheres to Properly Prepared: Concrete • Underlayment Grade Plywood • Fiberglass • Metal • Existing VCT • Raised Access Panels

Offering Complete Hotel & Restaurant Remodel Solutions



Greenest adhesive in the market:

The “greenest” adhesive on the market with 0.020 g/ml VOC content and 80% reduction of adhesive consumption. Guests can be confident of improved air quality and a healthier environment.

Lowest VOC in the industry!



Proven FRP Adhesive

Over 8 Million sq.ft. Installed - 30% Labor Savings



Each can covers a minimum of 70 sq.ft. One can covers two 8' x 4' panels.

Proven in over 8 million sq.ft. of warranted wall panel installation in the largest commercial environment across the U.S.

4 hour working time:

Installers can spray out the work area and then focus on sheet installation without stopping to spread glue -- typically installing 30% more FRP sheets a day using this method.

Instant grab – No bracing required:

Spray-Lock® FRP Adhesive has immediate shear strength which completely eliminates sagging, shifting, and bracing during installation. No need for mechanical anchors – no need to prop panels.

Conserves materials:

3 cans of Spray-Lock® FRP Adhesive, weighing a total of 5 lbs. provide the same coverage as a 3.5 gallon, 45 lb. bucket of trowel-based adhesive. Lifting 40 lbs. less saves installers time and energy. Less weight also means smaller truckloads.

Porous and nonporous application:

Spray-Lock® FRP Adhesive is one of the only adhesives that allows installation over porous and nonporous substrates – reducing the need for solvent-based adhesive. Spray-Lock® FRP Adhesive can also be used to install sheets over pre-existing: Metal Sheet, FRP, and Ceramic Tile.

No offensive odors – 0.020 g/ml VOC content:

Strong odors from traditional adhesives often require employees and customers to leave, resulting in loss of revenue and reduced employee productivity. With Spray-Lock® FRP Adhesive, there is no odor and no adverse environmental impact.

Product Benefits	Spray-Lock®	Conventional Trowel Adhesives
Cuts labor cost by 30% / Install in 30% less time	✓	✗
Working time - 4 hours	✓	✗
No bracing required - Immediate grab	✓	✗
Apply direct to substrate - Easy to handle	✓	✗
Releasable for repositioning (prior to rolling)	✓	✗
Adheres to porous & non-porous substrates	✓	✗
Adheres to: metal, steel, ceramic tile, paint, backer board, plaster, plywood sheet	✓	✗
Adheres to: vinyl, PVC, FRP, laminate For use with: FRP, NRP, Kydex, Acrovyn	✓	✗
No troweling	✓	✗
Cost competitive compared to trowel adhesive	✓	✗
Easy to clean / No offensive odors / Non-flammable	✓	✗
0.020 g/ml VOC content: EPA Test Method 8260B	✓	✗

Approved Panels: NRP • FRP • Kydex • Acrovyn • Plastic and Composite Wall Panels

Adheres to Properly Prepared Porous Substrates: Plywood • Drywall • DensShield • Water Resistant Drywall

Adheres to Properly Prepared Non-Porous Substrates: Metal • Steel • FRP • PVC • Paint • Ceramic Tile • High Pressure Laminate & more

A typical labor savings on a standard job is a minimum of 30%

A custom U.S. Post Office facility job using Spray-Lock® FRP Adhesive delivered a 30% labor savings.

		Spray-Lock® FRP Adhesive					Standard FRP Adhesive				
Sq.Ft.	FRP Panels	# Cans	# Lbs	Hours Labor Time	Labor Cost	Total Cost	# Buckets	# Lbs	Hours Labor Time	Labor Cost	Total Cost
2880	90	48	84	117	\$2880	\$6940	16	742	168	\$5040	\$9158



Your choice:

Handle 45 lbs. of adhesive and trowel it out
OR use 5 lbs. of Spray-Lock® FRP Adhesive
 and spray direct to the substrate.

Wall Tile Installation – Fast - Grout in 1 hour - Mosaics, Glass on Glass, Tile over Tile



Each can covers up to 50 sq.ft.

Experience faster tile installation, waste less time cleaning up, and grout the same day.

Grout after just one hour:

Unlike trowel grade adhesive, this adhesive possesses immediate shear strength, which enables grouting after just one hour.

Eliminates sagging and tile movement - No spacers, leaders and nails:

Once adhesive has tacked up, there is zero slip - the material will not move.

Less mess and clean-up:

No more cleaning of grout lines and mixing tools.

No thinset or mastic in grout lines:

Due to a thinner bed of Spray-Lock® Adhesive, there is no buildup or bleed through of thinset or mastic into grout lines.

Faster installation:

Spray-Lock® Adhesive Technology provides a proven, professional way to faster tile installation: grout the same day, and waste less time in clean up.

Spray the entire wall and set tile within minutes:

Once Spray-Lock® Adhesive has tacked up, only one hour of working time.

Product Benefits	Spray-Lock®	Conventional Adhesives
Grout after 1 hour	✓	✗
No sagging / No shims or spacers	✓	✗
Less mess and clean-up	✓	✗
1 hour open time	✓	✗
No thinset or mastic in grout lines	✓	✗
Faster installation	✓	✗
Visible layout lines	✓	✗
No mixing / No troweling	✓	✗
No ledger board	✓	✗
0.020 g/ml VOC's / 80% less adhesive used	✓	✗
Ideal for glass and mosaic tiles	✓	✗
3 year shelf life	✓	✗

For Use With Approved: Glass Tile • Mosaics • Porcelain • Ceramic Tile • Marble • Granite • Travertine • Thin Porcelain 4x8 Sheets
Adheres to Properly Prepared: Water Resistant Drywall • Hardie Board • Green Board • DensShield
 • Fiberglass • Plywood • Primed Sheet Rock • Metal • Glass • Existing Wall Tile & more

Adheres Mosaics, Glass on Glass and Tile over Tile!



Glass tile will adhere to mirror / glass and mirror will adhere to wall with Spray-Lock® Wall Tile Adhesive!
 (As shown in photo)

ESD Premium Spray Adhesive

Engineered to enhance safely-grounded static charges

Engineered to enhance the floor's ability to bring static charges safely to ground, Spray-Lock® ESD Adhesive provides major time savings compared to traditional ESD epoxy adhesive applications. Spray-Lock® ESD Adhesive is so advanced it provides a safe path to ground while using 80% less adhesive and offering superior protection against sub-floor moisture and pH.

Spray-Lock® ESD Adhesive is recommended for Electronic Manufacturing, Health Care, Mission Control, IT Equipment and Computer Server Rooms.



High moisture & pH tolerance:

Spray-Lock® ESD can withstand elevated moisture content of 7 lbs MVER, 85% RH with an 11 pH tolerance.

No sealers required:

No sealers required for most high moisture applications.

No HVAC Shutdown:

Spray-Lock® ESD eliminates the need to shut down HVAC when installing in occupied spaces.

80% less adhesive used:

Spray-Lock® ESD is designed with the environment in mind. This is the only technology that conserves 80% of the adhesive that is typically applied to adhere flooring. Spray-Lock® supports the reuse and recycling of ESD flooring due to the reduction of adhesive applied.

Indentation:

Spray-Lock® ESD uses 80% less adhesive, therefore eliminating adhesive indentation and displacement.

Allows all floor traffic immediately:

Spray-Lock® ESD is the only adhesive with sufficient shear strength that will allow immediate foot traffic, trade traffic and heavy rolling loads after installation.

Replaces epoxy:

Spray-Lock® ESD adhesives replace the need for expensive epoxy adhesives under ESD floors. It works better under ESD floors with heavy rolling loads or other heavy point loads because it eliminates the deep bed of troweled adhesive.

Materials we adhere:

- ESD vinyl tile • ESD sheet vinyl
- ESD carpet tile • Other ESD flooring materials

Suitable substrates:

- Concrete • Underlayment grade plywood
- Metal • Existing ESD vinyl tile
- Raised access panels • Epoxy

Product Benefits

Spray-Lock® ESD


Conventional ESD Adhesives

7LBS. MVER, 85% RH, 11 pH	✓	✗
Allows all foot & trade traffic immediatley	✓	✗
Supports most ESD flooring systems	✓	✗
Heat weld in 1 hour	✓	✗
Safe to install in occupied spaces	✓	✗
Wax/finish floors immediatley	✓	✗
High moisture and pH tolerance	✓	✗
No trowel marks	✓	✗
No epoxies needed	✓	✗
Supports reuse and recycling of flooring	✓	✗
2 year shelf life	✓	✗
0.020 g/ml VOC content	✓	✗



ESD Flooring Systems applied with Spray-Lock® ESD adhesive, were tested according to ANSI ESD S 7.1 yielding a rating of “very conductive”.

At both Surface to Ground and Surface to Surface testing, our products rated at 1.0×10^5 or better in an environmental relative humidity of both 50% and 12%. When tested according to ANSI/ESD S20.20 at RH of both 50% and 12% our products are in compliance with the standard when tested as a system with approved ESD vinyl tile and ESD carpet tile.

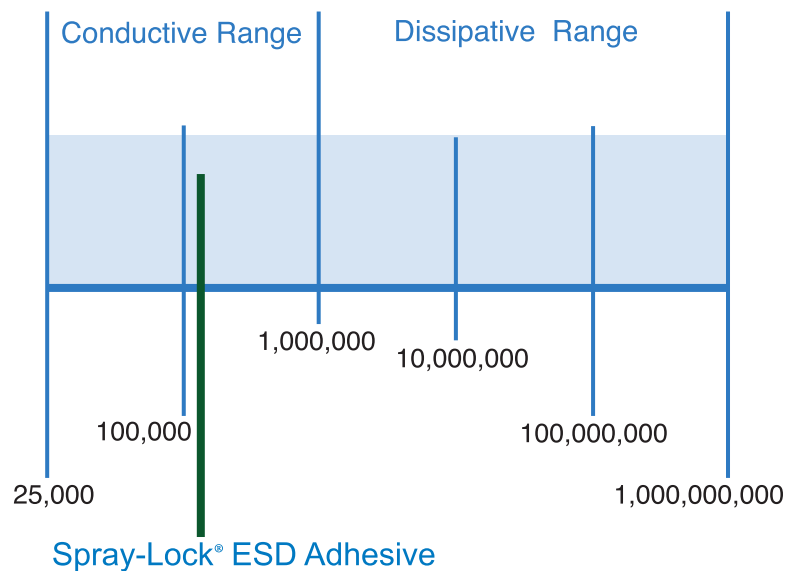

RugLock

Non-slip rug grip in a can!



A permanent spray-on non-slip rug backing in a can that provides a very slight tack to ensure your rugs stay where they are placed.

Works over all surfaces:

RugLock works all surfaces including, Hardwood, carpet, hard tiles, and vinyl flooring.

No Transfer or sticky residue:

RugLock, once cured, will stay permanently on backing of any rug without any transfer of the product or sticky residue left behind when the rug is removed.

Moisture barrier:

When two heavy coats are applied to the rug backing, it creates a moisture barrier on the backing of the rug, preventing any spills or pet accidents from soaking through your rug, to potentially stain your flooring.

Machine washable:

RugLock gives you the flexibility of machine-washing your rugs to clean them. Simply wash in cold water on delicate cycle, line dry, and RugLock will come right back to life.

No Height difference from non-slip backing:

Unlike the common anti-slip rug mats, RugLock is a permanent part of the backing once applied. RugLock leaves no visual height difference and keeps your edges firmly flat to avoid tripping.

Product Benefits

Works over all surfaces	✓
No transfer	✓
No sticky residue	✓
Can be used as a moisture barrier	✓
Machine washable	✓
No height difference from non-slip backing	✓
Safe & easy to use	✓
Permanent backing / won't wash off	✓
0.020 VOC's	



LEED

Point Summary

The ONLY adhesive technology offering 80% conservation of adhesive consumption world wide!



By using the Spray-Lock® line of green commercial adhesives, you may qualify for the following LEED™ credits:

Qualify for:

- EQ Credit 4.1 – Low-Emitting Materials, Adhesives 1

May apply towards reaching:

- EQ Credit 4.3 – Low-Emitting Materials, Carpet Systems 2
- MR Credit 2.1 – Construction Waste Management (EB)
- MR Credit 3.1 – Materials Reuse
- MR Credit 4.1 – Recycled Content
- MR Credit 5.1 – Regional Materials

1. Spray-Lock® contains 0.0 g/ml VOC's in content and meets or exceeds South Coast Air Quality Management District (SCAQMD) Rule #1168.

2. In order to comply with the requirements of EQ Credit 4.3, the adhesives used must comply with EQ Credit 4.1. See LEED New Construction reference guide.



* Selected products: 3100, 4500, 6200, FRP

** According to EPA document: "National Volatile Organic Compound Emission Standards For Consumer Products" for aerosol adhesives. (0.020 VOC Content)

No Toxicity In Adhesive Application



Sustainability & Adhesive Usage Report

Walmart

By using Spray-Lock® Platinum 6500 Green Adhesive, Walmart reduced its impact on the environment from 2006-2010 by the following amounts:

300,000,000 sq. ft.

- 6,913,850 lbs. of glue
- 333,198 gallons of water
- 229.71 tons CO₂e of green house gases
- 149 truckloads off the highway

Elmhurst Hospital

By using Spray-Lock® 3500 Green Adhesive, Elmhurst Hospital reduced its impact on the environment by the following amounts:

250,000 sq. ft.

- 19,407 lbs. of glue
- 874 gallons of water
- .86 tons CO₂e of green house gases
- .46 truckloads off the highway

Tom Thumb Supermarket

By using Spray-Lock® Platinum 6500 Green Adhesive, Tom Thumb Supermarket reduced its impact on the environment by the following amounts:

50,000 sq. ft.

- 3,881 lbs. of glue
- 175 gallons of water
- .17 tons CO₂e of green house gases
- .09 truckloads off the highway



Environmental Impact



Reduce

Spray-Lock® products are engineered to protect the environment and those who live in it. By using 80% less adhesive, Spray-Lock® directly impacts the conservation of our natural resources, Spray-Lock® uses water to deliver its polymers instead of solvents like traditional adhesives. When solvent-based adhesives are drying and curing, they are known to emit cancer-causing chemicals, which contribute toward “Sick Building Syndrome”. Spray-Lock® uses a safe, non-ozone-depleting propellant. No excess water is used in the process as all liquid waste is retained and then shipped off-site to be treated, recycled and reused. This is our commitment to keep our streams and rivers free of manufacturing waste.

Reuse

Spray-Lock® is designed to be easily releasable at the end of flooring life. This allows for reuse of flooring such as carpet tile, vinyl plank, or vinyl tile.

Recycle

Spray-Lock® allows you to divert used flooring from landfills and direct them to recycling facilities. Our products are packaged in recyclable aluminum cans and shipped in post-consumer recycled boxes. Thanks to the dramatic reduction in applied adhesive, Spray-Lock® leads the flooring industry in recyclability. Spray-Lock® allows you to divert used flooring from landfills and direct them to recycling facilities. Even Spray-Lock’s® packaging is recyclable.

HUMAN Impact

- **Easy to Apply**
- **Reduces Career-Shortening Injuries**
- **No Toxic Fumes**

Spray-Lock® gets installers off their knees, thus prolonging their productivity in the workplace and giving them a more viable lifestyle.



Standard Moisture & pH Limited Warranty

5-YEAR WARRANTY:

Flooring, Adhesive, and Labor.

Warranting over 400 flooring products & growing daily. Spray-Lock® Premium Eco-Adhesives warranties are effective only in the contiguous United States, Alaska & Hawaii.

**For complete detailed warranty, visit:
www.spraylock.com**

5 year
warranty

Warranting over 400
flooring products
& growing daily.

Spray-Lock® Catalog



3100 - Approved Sheet Flooring 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved resilient sheet flooring, allows for heat welding 1 hour after installation and all traffic immediately.

IL-3100-22-UD

Coverage per single 22 oz can: 150 - 185 ft²
Coverage per case of six cans: 900 - 1,110 ft²



3500 - Approved Sheet Flooring 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved resilient sheet flooring, allows for heat welding 1 hour after installation and all traffic immediately.

IL-3500-22-UD

Coverage per single 22 oz can: 150 - 185 ft²
Coverage per case of six cans: 900 - 1,110 ft²



4100 - Approved Rubber Flooring 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved rubber flooring, allows all traffic immediately after installation.

IL-4100-22-UD

Coverage per single 22 oz can: 100 - 125 ft²
Coverage per case of six cans: 600 - 750 ft²



6100 - Approved Carpet Pad 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved carpet pad, allows for carpet installation immediately.

IL-6100-22-UD

Coverage per single 22 oz can: 150 - 185 ft²
Coverage per case of six cans: 900 - 1,110 ft²



6200 - Approved Carpet Tile 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved carpet tile, allows all traffic immediately after installation.

IL-6200-22-UD

Coverage per single 22 oz can: 150 - 185 ft²
Coverage per case of six cans: 900 - 1,110 ft²



6500 - Approved Luxury Vinyl 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22oz aerosol adhesive used for approved carpet tile and LVT. Allows for immediate traffic after installation.

IL-6500-22-UD

Coverage per single 22 oz can: 150 - 185 ft²
Coverage per case of six cans: 900 - 1,110 ft²



9500 - Approved VCT 8 lbs MVER, 90% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used only for VCT. Allows for floor finish and traffic immediately.

IL-9500-22-UD

Coverage per single 22 oz can: 170 - 200 ft²
Coverage per case of six cans: 1,020 - 1,200 ft²



ESD 1005 - Conductive Spray Adhesive 7 lbs MVER, 85% RH, 11 pH

Water-based, 0.020 g/ml VOC content, 22oz aerosol adhesive used for approved conductive & dissipative flooring systems. Allows for immediate traffic after installation.

IL-ESD-1005-22-UD

Coverage per single 22 oz can: 100 ft²
Coverage per case of six cans: 600 ft²



FRP & Other Approved Wall Covering Adhesive

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved FRP coverings, allows for easy spray application.

IL-FRP-22
 Coverage per single 22 oz can: 70 ft² : 2-8ftx4ft Sheets
 Coverage per case of six cans: 420 ft²



Wall Tile Adhesive

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved wall tiles and mosaics, allows for grouting 1 hour after installation.

IL-WTA-22
 Coverage per single 22 oz can: 40 - 50 ft²
 Coverage per case of six cans: 240 - 300 ft²



RugLock

Water-based, 0.020 g/ml VOC content, 16 oz aerosol coating that is used as a permanent non-slip rug backing.

IL-RUGLOCK-16
 Coverage per single 16 oz can: 25 - 50 ft²
 Coverage per case of six cans: 150 - 300 ft²

Platinum Warranty: 10 lbs MVER, 93% RH, 12 pH



6500 Platinum - Approved LVT & Tile-Plank

10 lbs MVER, 93% RH, 12 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved LVT, Plank & Carpet Tile.

IL-6500P-22-UD
 Coverage per single can: 100 - 125 ft²
 Coverage per case of 6 cans: 600 - 750 ft²



9500 Platinum - Approved VCT

10 lbs MVER, 93% RH, 12 pH

Water-based, 0.020 g/ml VOC content, 22 oz aerosol adhesive that is used for approved VCT only.

IL-9500P-22-UD
 Coverage per single can: 170 - 190 ft²
 Coverage per case of 6 cans: 1,020 - 1,140 ft²



* Selected products: 3100, 4500, 6200, FRP
 ** According to EPA document: "National Volatile Organic Compound Emission Standards For Consumer Products" for aerosol adhesives. (0.020 VOC Content)



5959 Shallowford Road, Suite 405
Chattanooga, TN 37421
423.305.6151

www.spraylock.com



Spray-Lock® is committed to environmental consciousness. This brochure was printed on paper containing post consumer waste certified by the Forest Stewardship Council.