

Solutions that Stick™

SPRAY-APPLIED ADHESIVES FOR FLOORING AND WALLS





table of CONTENTS

04		ABOUT SPRAY-LOCK
05		COMPANY TIMELINE
06		PERFORMANCE
07		HIGHLIGHTS
08		INDUSTRY PROVEN
09		RETAIL & COMMERCIAL
10		FRP & WALL PROTECTION PANELS
11		HEALTHCARE
12		HOSPITALITY
13		SCHEDULES
15		3500
17		4500
19		6500
21		6500 PLATINUM
23		9500
25		9500 PLATINUM
27		ESD 1005
29		FRP ADHESIVE
31		WALL TILE ADHESIVE
33		RUGLOCK
34		SUSTAINABILITY & SAVINGS
35		WARRANTIES, LEED®, & CERTIFICATIONS

Product Details



about SPRAY-LOCK

Spray-Lock's mission is to develop and promote superior adhesives that reduce adhesive consumption by 80%, while saving the industry time and money.

For over 25 years, Spray-Lock Premium Eco Adhesives has been producing products that deliver occupational safety and health benefits to installers, clients, and the overall environment.

We are more than adhesives; we are Solutions that Stick™. By using Spray-Lock Premium Eco Adhesives for your floor and wall installations you'll get solutions:



Time-saving Technology



Superior Moisture & pH Tolerance



Quality Tech Support




Excellent Warranties



Environmentally Responsible

Distributors

Interested in becoming a Spray-Lock adhesives distributor? Ask us how!

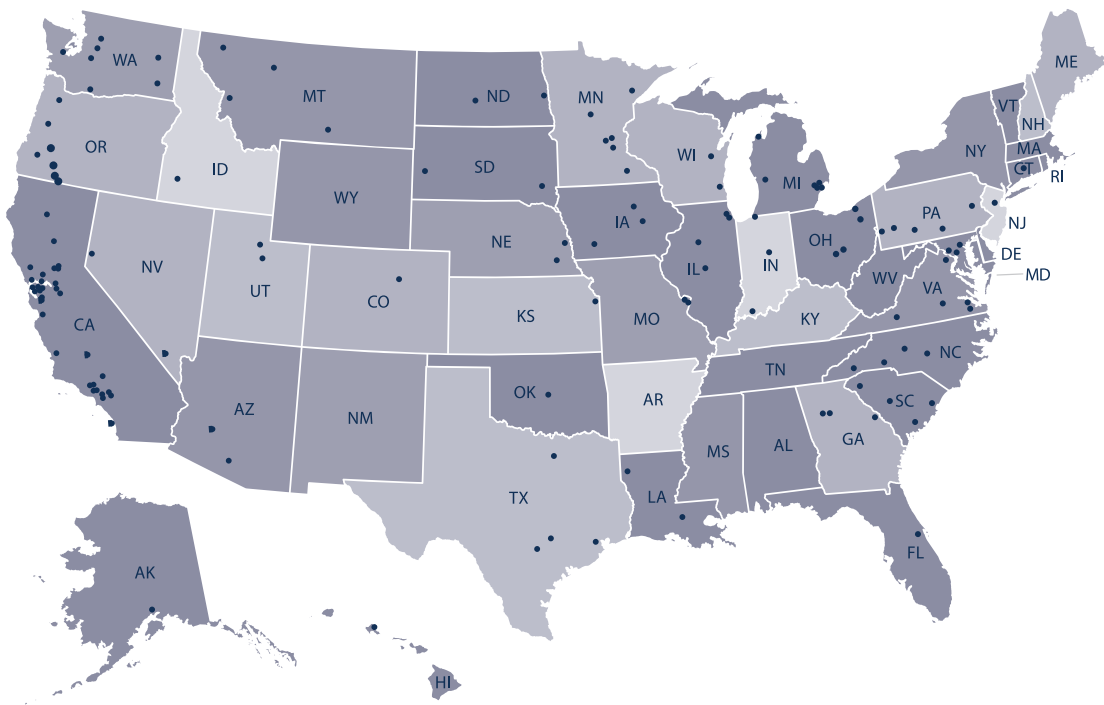

company TIMELINE



1997

Spray-Lock Premium Eco Adhesives technology first enters the marketplace.



2000

Mohawk begins using Spray-Lock adhesives to install carpet tile.



2004

Walmart's 300 million square foot program specifies use of Spray-Lock Platinum 6500 adhesive in LVT application.



2006

Spray-Lock begins private labeling for multiple flooring manufacturers.

2007

Spray-Lock expands to flooring companies in Australia, New Zealand, the United Kingdom, Japan, and Germany.

2008

Spray-Lock begins selling direct.



2009

Spray-Lock becomes ISO certified.



2011

Spray-Lock begins national distribution.



2014

Spray-Lock launches its new innovative consumer product, RugLock.



2017

Spray-Lock adhesives are now used in more than 19 countries and represented by distribution throughout the United States.

2018

Spray-Lock is awarded a patent for RugLock.



2019

Spray-Lock introduces the Total20 System, its 20-year warranty.

2020

Spray-Lock commences direct adhesives sales in the E.U. and the U.K.



2022


Spray-Lock celebrates 25 years in business!

PERFORMANCE


Spray-Lock, Inc. manufactures a revolutionary line of Premium Eco Adhesives. Using the world's most advanced and earth-friendly adhesive technology, Spray-Lock adhesives are formulated to outperform traditional (trowel) adhesives in floor and wall applications.



Spray-Lock 3500 for sheet goods allows **rolling hospital beds** and equipment to be placed in rooms as soon as new flooring is laid!

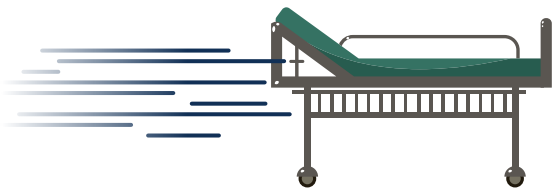

- ✓ **ALL ADHESIVES ARE WATER-BASED**
- ✓ **3 YEAR SHELF LIFE FOR MOST ADHESIVES; OPENED OR UNOPENED**
- ✓ **0.0 g/mL VOC CONTENT; LESS THAN ½ THE VOC CONTENT OF A CRANBERRY!**
- ✓ **EXCEPTIONAL SHEAR STRENGTH**
- ✓ **EXCELLENT FOR USE IN OCCUPIED SPACES; NO NEED TO SHUT DOWN HVAC**

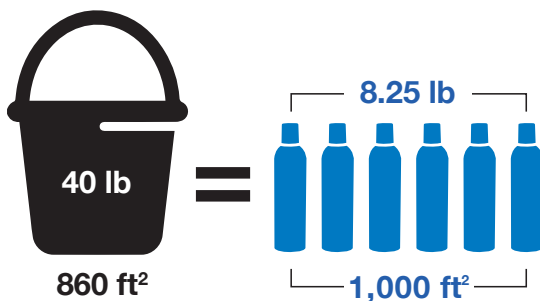

Potential knee and back injuries can be avoided by using Spray-Lock adhesives! Each product is packaged in lightweight, recyclable aluminum cans, and when compared to a typical bucket of traditional trowel-applied adhesive, they are a real joint saver. Coverage from just a few cans of Spray-Lock is guaranteed to equal or exceed the coverage provided by a much heavier bucket of trowel adhesive.

HIGHLIGHTS



IMMEDIATE ACCESS TO ALL TRAFFIC

Instant shear strength allows all variations of traffic immediately upon installation, (even heavy rolling loads!) keeping your project moving forward.



EXTENDED WORKING TIME

Save time by completing larger areas at once rather than in phases with 2-4 hour working times.



HEAT WELD IMMEDIATELY

Avoid the 24-hour delay of conventional adhesives. With Spray-Lock, once you've rolled the floor you can heat weld it!



ELIMINATE TROWEL MARKS

Trowels and the unsightly marks they can cause are eliminated by using Spray-Lock spray-applied adhesives.



ELIMINATE INDENTATIONS & TELEGRAPHING

The low-profile nature of Spray-Lock products uses 80% less adhesive, providing a direct bond to the substrate.



NO HARMFUL CHEMICALS OR OFFENSIVE ODORS

Can be used in occupied spaces with 0.0 g/mL VOC formulas that lead the industry in indoor air quality and performance.



PREVENT WORK-RELATED INJURIES

Increase productivity and reduce career-shortening injuries with easy, standing applications that keep installers off their knees.



ECO-FRIENDLY FORMULAS

Spray-Lock's water-based technology is certified by FloorScore® and CRI™ Green Label Plus®.



HIGH MOISTURE & pH TOLERANCE

Be prepared for anything with an adhesive that can withstand up to 99% RH, 10 lbs MVER, and 12 pH.



QUICK & EASY WALL APPLICATIONS

Spray-Lock FRP and Wall Tile adhesives are the answer to messy, cumbersome traditional methods.

3500

4500

6500

6500 Platinum

9500

9500 Platinum

FRP Adhesive

Wall Tile Adhesive

industry PROVEN

Saving time and money aren't the only reasons installers are making the switch to Spray-Lock adhesives

With proven compatibility in a variety of applications, Spray-Lock products provide the flexibility needed to maximize project efficiency. This versatility has developed a loyal customer base of retailers throughout North America.

Below is a selection of well-known industry leaders that have successfully made the switch to Spray-Lock.





retail & COMMERCIAL

Proven time savings across the U.S. and around the world

- ✓ ACCELERATE YOUR BUILDING SCHEDULE
- ✓ ALLOW ALL TRAFFIC IMMEDIATELY, CONSUMER OR TRADE TRAFFIC
- ✓ CAN BE USED IN OCCUPIED STORES
- ✓ NO OFFENSIVE ODORS
- ✓ WAX AND FINISH FLOORING IMMEDIATELY

Fast-track construction has become the standard in the commercial and retail building process. Spray-Lock adhesives make it easy to keep pace by allowing all traffic immediately after installation. The instant shear strength of the flooring adhesives can tolerate heavy weight-bearing loads without any indentation or displacement. Immediately upon installation, floors can be waxed and finished, and clothing racks or displays can be replaced. The low-odor formulas allow retailers to remain open to customers during installation.

Expedite your installation of **wall protection panels** with Spray-Lock FRP Adhesive, the world's fastest and most productive commercial wall adhesive!

FOR USE WITH
LVT/LVP — 6500
Carpet Tile — 6500
VCT — 9500
Wall Panels — FRP

STANDARD GRADE
98% RH
8 lbs MVER
11 pH

PLATINUM GRADE
99% RH
10 lbs MVER
12 pH

Spray-Lock FRP Adhesive works with FRP, NRP, wall protection panels, LVT on walls, and more!

Turn to pages 10 & 29 for further info.

Spray-Lock has been an invaluable partner over the past several years, helping us provide the *cost effective solutions* for high-moisture and high-pH slabs to our customers across the country.

Beyond that, their service and responsiveness have always been outstanding, which is extremely important with fast-track construction schedules, *enabling us to... exceed our customer's expectations.*"

— Joe Dovenmuehle, VP STRATEGIC ACCOUNTS
Inside Edge Commercial Interior Services

FRP & WALL PROTECTION PANELS

Spray-Lock FRP Adhesive is the fastest-working adhesive for FRP and wall protection panels



- ✓ **FRP ADHESIVE HAS A WORKING TIME OF UP TO 8 HOURS; THE LONGEST ON THE MARKET!**
- ✓ **SPRAY THE WALL FIRST, THEN PUT UP PANELS**
- ✓ **WORKS OVER POROUS AND NON-POROUS SUBSTRATES**
- ✓ **OVER 26 MILLION FT² OF SUCCESSFUL INSTALLS NATIONWIDE WITH FRP ADHESIVE**

When you think of Spray-Lock, what do you picture? Probably flooring adhesives for carpet tile, LVT, LVP, VCT, ESD, and sheet goods. What about FRP and wall protection panels? Spray-Lock FRP Adhesive is the FASTEST-GROWING adhesive in the lineup of products and with good reason!

Having turned the traditional trowel-based adhesives on their lids when it comes to productivity, Spray-Lock FRP Adhesive is the only wall protection adhesive that offers ALL DAY working time. Streamline your install by eliminating the slow and messy process of troweling glue onto individual panels, which can cause breakage under the excess weight. Simply spray the wall directly with FRP Adhesive and install your panels!

With an infield production increase of up to 50% more panels installed using Spray-Lock FRP Adhesive, don't you think it's time for you to kick the bucket?



A single 22 oz can of FRP Adhesive will cover up to 70 ft², or the equivalent of two 8'x4' sheets of material!

Material will adhere flush to nearly ALL smooth, flat, and clean substrates, both porous & non-porous.

HEALTHCARE

Millions of square feet of proven healthcare flooring solutions

- ✓ **HEAT WELD SHEET VINYL IMMEDIATELY**
- ✓ **NO ADHESIVE INDENTATION OR DISPLACEMENT**
- ✓ **NO NEED FOR EPOXY UNDERNEATH FOOTPRINT OF HOSPITAL BEDS**
- ✓ **ALLOWS FOR ALL ROLLING LOADS IMMEDIATELY**
- ✓ **FOR USE IN NEW CONSTRUCTION AND REMODELS**

Flooring installations in healthcare facilities face a number of challenges. From relocating patients to trying to maintain profitable occupancy, they are an expensive undertaking. Spray-Lock adhesives can actually save a facility two billable days in occupied settings!

Rather than the 48-72 hour delay of epoxies, Spray-Lock installations are ready for heat welding, hospital bed traffic, and room occupancy the minute the installs are completed.

The unique, low odor, 0.0 g/mL VOC formulas save customers the costs of wing closures and installers the headache of specialized ventilation.

Spray-Lock isn't only for floors. There are also solutions for walls! With an all-day working time of up to 8 hours, speed up installations of wall protection panels, FRP, NRP, LVT on walls, and more by up to 50%! Read all about it on pages 10 and 29.

FOR USE WITH


- Sheet Vinyl — 3500
- Rubber Flooring — 4500
- LVT/LVP — 6500
- Carpet Tile — 6500
- VCT — 9500
- Wall Panels — FRP

STANDARD GRADE

- 98% RH
- 8 lbs MVER
- 11 pH

PLATINUM GRADE

- 99% RH
- 10 lbs MVER
- 12 pH

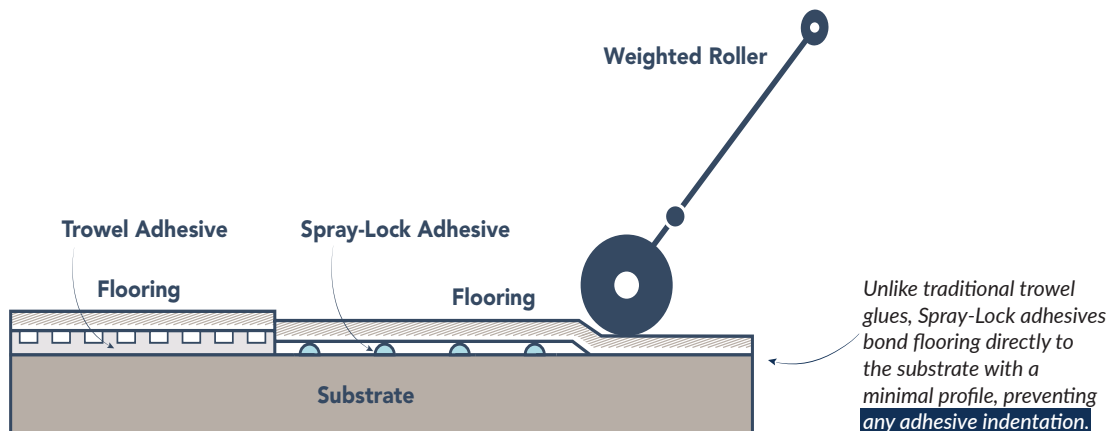

HOSPITALITY

Innovative solutions for fast-track remodels and refreshes

FOR USE WITH

LVT/LVP – 6500
Carpet Tile – 6500
VCT – 9500
Wall Panels – FRP

STANDARD GRADE

98% RH
8 lbs MVER
11 pH

PLATINUM GRADE


99% RH
10 lbs MVER
12 pH

- ✓ **FASTEST ADHESIVE FOR INSTALLS AND REPAIRS**
- ✓ **NO OFFENSIVE ODORS**
- ✓ **ALLOWS FOR IMMEDIATE USE OF SPACE**
- ✓ **SOLUTIONS FOR FLOOR AND WALL INSTALLATIONS**

Time is money during a remodel, and no one saves you more of both than Spray-Lock. Even the best-laid plans can get bogged down by unfortunate mix-ups with schedules, ruining your guests' experiences. When time is of the essence, turn to Spray-Lock adhesives which allow **quick turnaround** times without loss of quality.

The low odor, 0.0 g/mL VOC content formulas are safe to use in occupied spaces and around guests. Although areas may still need to be sectioned off while work is completed, the fact remains that hours (even days!) will be saved due to the instant shear strength of Spray-Lock adhesives which allow immediate use of the area once the installation is complete.

Within the hospitality sector, Spray-Lock adhesives allow for quick remodels without diminishing the overall guest experience.



Need a quick refresh on an existing conference or hotel room? You can use Spray-Lock FRP Adhesive (p.29) to create a feature wall of wood-look LVT.

Simply spray, set, then stand back to enjoy the view!

FRP Adhesive works with FRP, NRP, wall protection panels, LVT on walls, and more!

SCHEDULES

The fastest working floor and wall adhesives on Earth

- ✓ **ALLOWS ALL TRAFFIC AND ROLLING LOADS IMMEDIATELY AFTER INSTALLATION**
- ✓ **HEAT WELD SHEET VINYL IMMEDIATELY AFTER INSTALLATION; NO WAIT TIME!**
- ✓ **ELIMINATES ADHESIVE INDENTATION AND DISPLACEMENT FROM HEAVY ROLLING LOADS**
- ✓ **ALLOWS IMMEDIATE INITIAL WAX AND FINISHING**
- ✓ **APPLIES AND TACKS UP FASTER WITH LONG WORKING TIMES**
- ✓ **PACKAGED IN RECYCLABLE ALUMINUM CANS TO ELIMINATE LANDFILL WASTE BY 100%**
- ✓ **REDUCES THE AMOUNT OF MATERIAL NEEDED TO BE SHIPPED, STORED, AND HANDLED**

When deadlines are looming and making up for lost time is a top priority, you need the assurance that those projects will be completed as promised without compromising your budget.

Look no further than Spray-Lock: the only brand to offer the fastest working floor and wall adhesives on the planet!

Time equals money, so get the job done right the first time with Spray-Lock Premium Eco Adhesives.

Installation example: PROJECT AREA 100,000 FT²

**SPRAY-LOCK
FLOOR ADHESIVE**

VS

**TROWEL-ON
COMPETITION**



⅓ pallet of 100 cases = 600 cans
TOTAL WEIGHT TO SHIP: 1,100 LB
EMPTY CANS ARE RECYCLED



3 pallets of 117 pails (4 gal/ea)
TOTAL WEIGHT TO SHIP: 4,212 LB
EMPTY PAILS GO TO LANDFILL



3500

- ✓ **ALLOWS ROOM OCCUPANCY**
Hospital beds, surgical stations, and heavy carts can immediately be placed in rooms without fear of adhesive indentation.
- ✓ **HEAT WELD IMMEDIATELY**
No need to wait after floor installation to heat weld seams.
- ✓ **REPLACES NEED FOR EPOXIES**
3500 is easy and quick to set, saving you days on installation!
- ✓ **KEEP HVAC CIRCULATING**
3500 is formulated with 0.0 g/mL VOC content and no harsh or offensive fumes.

Spray-Lock 3500 is designed for the unique needs of sheet goods installations.

As opposed to traditional trowel adhesives, which take an average of 48-72 hours to cure, the use of 3500 allows for *immediate* heat welding and full floor access as soon as installation is complete. This is the ideal product for healthcare facilities.

3500 eliminates the need to shut down the HVAC or use fans to exhaust fumes from the building during a remodel or while the space is occupied.

SKU: SL-3500-22-UD

FOR USE WITH
Sheet Goods

WARRANTIED UP TO
98% RH
8 lbs MVER
11 pH

COVERAGE RATES
150-185 ft² PER CAN
(14-17.2 m²)
900-1,110 ft² PER CASE
(84-103.2 m²)

SUITABLE SUBSTRATES
Concrete
Fiberglass
Metal
Underlayment-grade Plywood

Because the hospital was opening so soon, we needed an adhesive that provided a short set up time and the ability to immediately roll in all equipment over the flooring.

With Spray-Lock, we were able to turn the floor back over to the hospital right away. Spray-Lock is the answer the flooring industry has been looking for over the past few years. They helped us do the impossible."

— Colleen DeFilippo,
Former president of Spectra Pittsburgh speaking on the Wheeling Hospital project



See approved floor product list at spraylock.com



4500

- ✓ **2-HOUR WORKING TIME**
Excellent working time allows flooring to be installed right after adhesive tack.
- ✓ **INSTANT SHEAR STRENGTH**
Won't cause displacement or movement of finished flooring.
- ✓ **BREATHE EASY**
4500 is formulated with 0.0 g/mL VOC content and no harsh or offensive fumes.

Spray-Lock 4500 is a versatile spray adhesive naturally suited for adhering approved rubber flooring in commercial and residential applications.

Installations of vulcanized virgin rubber flooring will benefit from the use of 4500. The adhesive's instant shear strength allows all traffic immediately, but won't cause any displacement or movement of finished flooring caused by heavy weight-bearing items.

Patrons and employees won't have difficulty breathing due to any strong application odors because 4500 is a 0.0 g/mL VOC product. It allows occupation of the space as soon as installation is complete.

SKU: SL-4500-22-UD

FOR USE WITH
Rubber Flooring

WARRANTIED UP TO
98% RH
8 lbs MVER
11 pH

COVERAGE RATES
100-125 ft² PER CAN
(9.2-11.6 m²)
600-750 ft² PER CASE
(55.2-69.6 m²)

SUITABLE SUBSTRATES
Concrete
Existing VCT
Fiberglass
Metal
Underlayment-grade Plywood



See approved floor product list at spraylock.com



6500

- ✓ **IMMEDIATE ACCESS**
Spray, set, go! No need to wait long periods of time before using the floor.
- ✓ **4-HOUR WORKING TIME**
Superior working time allows larger areas of flooring to be installed right after adhesive tack.
- ✓ **BREATHE EASY**
6500 is formulated with 0.0 g/mL VOC content and no harsh or offensive fumes.

Spray-Lock 6500 is designed for use with luxury vinyl tile (LVT), luxury vinyl plank (LVP), and carpet tile & pad.

LVT/LVP is quickly becoming the fastest growing flooring option in both commercial and residential installations due to its low cost, durability, and variety of designs. 6500 increases those benefits by reducing overall cost per square foot and keeping projects ahead of schedule by allowing immediate traffic.

Some national retailers have been able to reduce their construction schedule solely based on the benefits and productivity of 6500.

SKU: SL-6500-22-UD

FOR USE WITH

**LVT
LVP
Carpet Tile
Carpet Pad**

WARRANTIED UP TO

**98% RH
8 lbs MVER
11 pH**

COVERAGE RATES

**150-185 ft²
(14-17.2 m²)**

**PER
CAN**

**900-1,110 ft²
(84-103.2 m²)**

**PER
CASE**

SUITABLE SUBSTRATES

**Concrete
Fiberglass
Metal
Underlayment-grade
Plywood**



See approved floor product list at spraylock.com



6500 PLATINUM

- ✓ **HIGH RH COVERAGE**
6500 Platinum is warranted up to 99% RH.
- ✓ **4-HOUR WORKING TIME**
Superior open working time allows larger areas of flooring to be installed right after tack.
- ✓ **NO SCHEDULE DELAYS**
Downtime caused by traditional moisture mitigation is eliminated.
- ✓ **IMMEDIATE ACCESS**
Spray, set, go! No need to wait before allowing foot and trade traffic use of finished floor.

Spray-Lock 6500 Platinum has been a game changer for over 15 years as a high-moisture and pH-tolerant adhesive for luxury vinyl planks and tiles (LVP/LVT).

6500 Platinum has taken one national account's moisture failure rate of 23% down to less than 1% over a span of 300 million square feet.

Whatever the cause for excessive moisture in concrete substrates, 6500 Platinum is a time-saving and reliable solution for fast-track installations.

SKU: SL-6500P-22-UD

FOR USE WITH
**LVT
LVP**
Approved Carpet Tile

WARRANTIED UP TO
99% RH
10 lbs MVER
12 pH

COVERAGE RATES

100-125 ft² (9.3-11.6 m ²)	PER CAN
600-750 ft² (55.8-69.6 m ²)	PER CASE

SUITABLE SUBSTRATES
**High-moisture
Concrete**



See approved floor product list at spraylock.com



9500

- ✓ **WAX AND FINISH IMMEDIATELY**
You can wax the VCT floor as soon as the installation is complete!
- ✓ **IMMEDIATE ACCESS**
Spray, set, go! No need to wait before allowing foot and trade traffic use of finished floor.
- ✓ **BREATHE EASY**
9500 is formulated with 0.0 g/mL VOC content and no harsh or offensive fumes.

Spray-Lock 9500 takes productivity to a new level for vinyl composite tile (VCT). It is 30% faster in adhesive application and has a much lower profile when compared to trowel adhesives.

A popular option for school cafeterias and other facilities with large footprints, 9500 can be sprayed over areas quickly, saving time in an application that typically would take many hours.

VCT is a popular commercial flooring option that is attractive and affordable. Installers can eliminate the costly process of waiting for adhesive to set up by relying on 9500's short tack time and 2-hour working time. As soon as installation is complete, floors can be waxed, finished, and opened to all traffic.

SKU: SL-9500-22-UD

FOR USE WITH
VCT
Recycled Rubber

WARRANTIED UP TO
98% RH
8 lbs MVER
11 pH

COVERAGE RATES
FOR VCT:

170-200 ft² (15.8-18.6 m ²)	PER CAN
1,020-1,200 ft² (94.8-111.6 m ²)	PER CASE

FOR RECYCLED RUBBER:

100-125 ft² (9.2-11.6 m ²)	PER CAN
600-750 ft² (55.2-69.6 m ²)	PER CASE

SUITABLE SUBSTRATES
Concrete
Fiberglass
Metal
Underlayment-grade
Plywood



See approved floor product list at spraylock.com



9500 PLATINUM

- ✓ **WAX AND FINISH IMMEDIATELY**
You can wax the VCT floor as soon as the installation is complete!
- ✓ **IMMEDIATE ACCESS**
Spray, set, go! No need to wait for long periods of time before using the floor.
- ✓ **2-HOUR WORKING TIME**
Superior open working time allows larger areas of flooring to be installed right after tack.
- ✓ **NO SCHEDULE DELAYS**
Downtime caused by traditional moisture mitigation is eliminated.

Spray-Lock 9500 Platinum is our warranted solution for installing VCT in high-moisture environments. In addition to having Spray-Lock's reliably short tack time and long working time, 9500 Platinum is the safeguard against failed VCT installations due to high-moisture issues. Additionally, 9500 Platinum's low profile provides a moisture tolerant floor with a finish as smooth as the substrate.

SKU: SL-9500P-22-UD

FOR USE WITH
VCT

WARRANTED UP TO
99% RH
10 lbs MVER
12 pH

COVERAGE RATES

170-190 ft² (15.8-18.6 m ²)	PER CAN
1,020-1,200 ft² (94.8-111.6 m ²)	PER CASE

SUITABLE SUBSTRATES
**High-moisture
Concrete**



See approved floor product list at spraylock.com




Test Results

ESD Flooring Systems, applied with ESD 1005, were tested according to ANSI/ESD S7.1 yielding a rating of "very conductive."

At both Surface-to-Ground and Surface-to-Surface testing, ESD 1005 rated at 1.0×10^5 or better in an environmental relative humidity of both 50% and 12%.

When tested according to ANSI/ESD S20.20 at RH of both 50% and 12%, ESD 1005 is in compliance with the standard when tested as a system with approved ESD vinyl tile and ESD carpet tile.

CONDUCTIVE RANGE

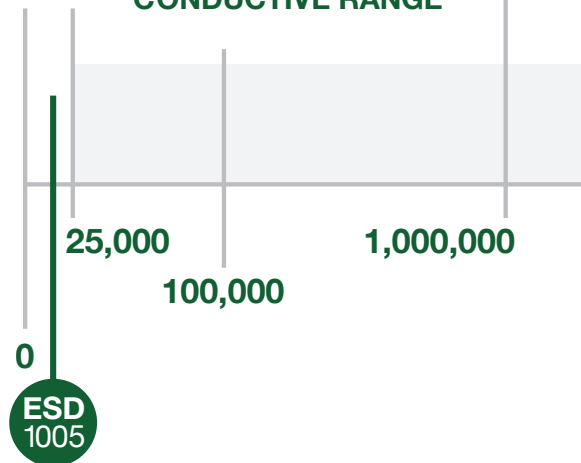

ESD 1005

- ✓ **REQUIRES NO SEALERS**
- ✓ **BRINGS STATIC CHARGES SAFELY TO GROUND**
- ✓ **USES 80% LESS ADHESIVE THAN TRADITIONAL EPOXIES**

Spray-Lock ESD 1005 is engineered to enhance the floor's ability to bring static charges safely to ground. In fact, it is so advanced, ESD 1005 provides a safe path to ground while using 80% less adhesive. This allows for major time savings compared to traditional ESD epoxy adhesive applications.

ESD 1005 is recommended for electronic manufacturing, healthcare facilities, mission control, IT equipment and computer server rooms, with additional applications growing steadily.

SKU: SL-ESD-1005-22-UD

FOR USE WITH
ESD Vinyl Sheets
ESD Vinyl Tile
ESD Carpet Tile


WARRANTIED UP TO
85% RH
7 lbs MVER
11 pH

COVERAGE RATES
100 ft² PER CAN
 (9.3 m²)
600 ft² PER CASE
 (55.8 m²)

SUITABLE SUBSTRATES
Concrete
Metal
Epoxy
Underlayment-grade Plywood
Existing ESD Vinyl Tile
Raised Access Panels



DISSIPATIVE RANGE

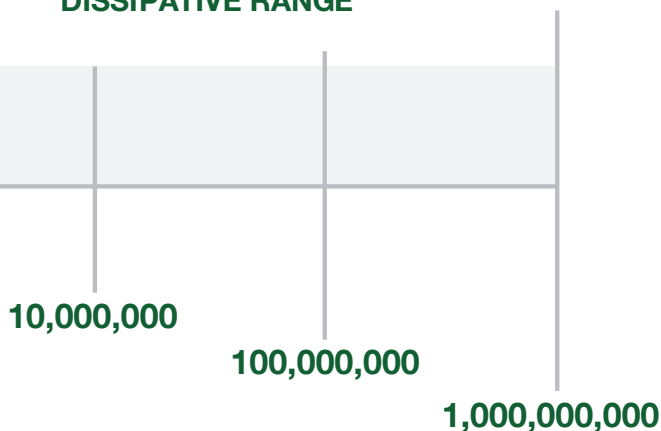



Installation example: PROJECT AREA 31,000 FT²

**SPRAY-LOCK
FRP ADHESIVE**

VS

**TROWEL-ON
COMPETITION**



½ pallet of 74 cases = 444 cans
TOTAL WEIGHT TO SHIP: 814 LB
EMPTY CANS ARE RECYCLED



3 ½ pallets of 125 pails (3.5 gal/ea)
TOTAL WEIGHT TO SHIP: 5,471 LB
EMPTY PAILS GO TO LANDFILL

FRP ADHESIVE

Use for
more than
just FRP!

The fastest-working protective paneling adhesive on the market

- ✓ **ALL DAY WORKING TIME**
With up to 8 hours of working time, large areas of the wall can be sprayed at once, efficiently giving installers expediency in application of panels.
- ✓ **CONSERVES MATERIALS**
Three cans of FRP Adhesive, weighing a total of 5 lb, provide the same coverage as a 3.5-gallon, 45-lb bucket of trowel-on adhesive.
- ✓ **INSTANT SHEAR STRENGTH**
Eliminates sagging, shifting, and bracing during installation. No need for mechanical anchors or propping panels.
- ✓ **REDUCES INSTALLER FATIGUE**
Lifting 40 lb less saves installers time and energy.

Spray-Lock FRP Adhesive is the best option for installers looking for a lightweight spray adhesive with one of the longest working times on the market. Instead of constantly applying adhesive to the back of panels, installers can spray out the entire work area and focus on sheet installation once adhesive achieves tack. FRP's instant shear strength eliminates panels from sagging, thus saving valuable time.

Offering a low profile that adheres to both porous and non-porous surfaces, FRP Adhesive is versatile for nearly all types of panels and substrates. Each aluminum can will cover up to 70 ft² or two sheets of material (8'x4' panels).

SKU: SL-FRP-22

FOR USE WITH

**FRP
NRP
Wall Protection Panels
Plastic and
Composite Wall Panels
LVT on Walls
and more!**

COVERAGE RATES

70 ft² PER CAN
(6.5 m²)

420 ft² PER CASE
(39 m²)

SUITABLE SUBSTRATES

POROUS
**Plywood
Drywall
DensShield
Water-resistant
Drywall
and more!**

NON-POROUS

**Metal
Steel
FRP
PVC
Paint
Ceramic Tile
High Press Laminate
and more!**



See approved wall product list at spraylock.com



Wall Tile ADHESIVE

- ✓ **FASTER INSTALLATION**
Spray wall and set tile within minutes.
- ✓ **ELIMINATES SAGGING AND TILE MOVEMENT**
No need for ledgers! Once the adhesive has tacked up there is absolutely no slipping.
- ✓ **NO THINSET OR MASTIC IN GROUT LINES**
Due to a thinner bed of adhesive, there is no buildup or bleed-through of thinset or mastic into grout lines, which is especially important for glass and stone tile.

Spray-Lock Wall Tile Adhesive (WTA) is one of the most innovative developments in wall tile installations, cutting install time by over 50%.

Grouting can begin 1 hour after the application, giving installers the flexibility to finish a backsplash or wall tile installation in only one day, rather than coming back 24 hours later to grout as required by traditional methods.

With WTA, there are no more sagging tiles or the need for a ledger board, shims, or spacers when working around a design, and tile can be installed over porous or non-porous substrates.

WTA is approved for use with individual tiles up to 6"x6" and all mosaic tiles on a backing. WTA was tested by The Tile Council of North America for use in shower applications.

SKU: SL-WTA-22

FOR USE WITH

**Glass
Mosaic
Porcelain
Ceramic
Marble
Granite
Travertine**

COVERAGE RATES

40-50 ft² PER CAN
(3.7-4.6 m²)

240-300 ft² PER CASE
(22.2-27.6 m²)

SUITABLE SUBSTRATES

**Metal
Glass
Hardie Board
Green Board
Plywood
Fiberglass
DensShield
Existing Wall Tile
Primed Sheetrock
Water-resistant
Drywall**





RUGLOCK

RugLock is a permanent spray-on non-slip rug grip that firmly holds rugs in place on interior surfaces including hardwood, hard tiles, and vinyl flooring.

Compared to rug pads, RugLock costs less per square foot and can be used on any shape or size of rug without unsightly pads sticking out or raising the profile of the rug. RugLock is eco-friendly with 0.0 g/mL VOC content, water-based, and is made in the USA, making it the best option for environmentally conscious consumers. It is even safe for use around children and pets!

According to the National Safety Council, falls are the leading type of unintentional home-related injuries and deaths. With the introduction of RugLock, Spray-Lock has entered the consumer market with a real-world solution to a common household danger.

SKUS: RL-16
RL-10



ECO-FRIENDLY



NO DAMAGE TO FLOOR



EASY TO USE

FOR USE WITH
Area Rugs

COVERAGE RATES

50 ft² 16 oz
(4.6 m²)

30 ft² 10 oz
(2.8 m²)

SUITABLE SUBSTRATES

**Hardwood Flooring
Hard Tiles
Vinyl Flooring**



For more information, visit
ruglock.com

sustainability & SAVINGS

The following case studies excerpts show the reduced environmental impact of Spray-Lock adhesives versus traditional trowel-applied adhesives.

WALMART

300,000,000 ft²

By using Spray-Lock adhesives on 300 million ft² of retail space over a span of 8 years, Walmart has **realized a savings** of:

GLUE



6,913,850 lb of trowel adhesive

SHIPPING



149 truckloads of glue off highway

WATER



333,198 gallons of water

CO₂e



229.71 tons of greenhouse gases

MISSION HOSPITAL

620,000 ft²

By using Spray-Lock adhesives, Mission Hospital reduced its impact on the environment by the following amounts:

GLUE




48,129 lb of trowel adhesive

WATER



2,167 gallons of water

CO₂e



2.5 tons of greenhouse gases

Mission Hospital's adhesive consumption reduction

Mission Hospital used a total of five pallets (130 cases per pallet) of Spray-Lock product. Had they gone the traditional trowel-applied route, they would have used 20 pallets of 48 pails. That is a significant savings!



Traditional trowel-applied adhesive



WARRANTIES

Your project is protected with a Spray-Lock warranty which covers over 600 flooring products, including labor, for a minimum of 5 years.

All warranties listed are effective only in the contiguous United States, Alaska & Hawaii.

- **Standard Warranty:**
98% RH, 8 lbs MVER, 11 pH
- **Platinum Warranty:**
99% RH, 10 lbs MVER, 12 pH

TOTAL20TM
system

A system warranty with Spray-Lock Premium Eco Adhesives and Spray-Lock Concrete Protection (SCP)

Contact your local Spray-Lock rep to find out more about this system warranty!

LEED[®]

Spray-Lock technology offers 80% conservation of adhesive consumption and promotes healthy indoor air quality

CDPH STANDARD METHOD V1.1-2010 COMPLIANT
All Spray-Lock adhesives contribute to LEED[®] v4 Indoor Environmental Quality – Low-Emitting Materials credit and are compliant in accordance with California Department of Public Health CDPH/EHLB Standard Method v1.1-2010 for school classrooms, private offices and single-family residence parameters when modeled as flooring.

Our adhesives also conform to the South Coast Air Quality Management District’s SCAQMD Rule 1168 – Adhesives and Sealants (January 2005), as well as the Hong Kong Air Pollution Control (VOC) Regulation.



We contribute to this credit for the following construction projects:

- **New Construction**
- **Commercial Interiors**
- **Schools**
- **Retail**
- **Healthcare**
- **Hospitality**
- **Data Centers**
- **Warehouses**
- **Distribution Centers**

Certifications




Products bearing the FloorScore[®] logo meet the indoor air quality emissions criteria of LEED[®], CHPS, the Green Guide for Healthcare, and are recognized by a long list of healthy building programs.



Products bearing the CRI[™] Green Label Plus[®] logo are tested and found to have very low emissions of Volatile Organic Compounds (VOCs), setting a higher standard for indoor air quality.



All Spray-Lock products exceed US EPA Indoor Air Quality Standards for VOCs by having 0.0 g/mL VOCs, according to EPA Test Method 8260B.

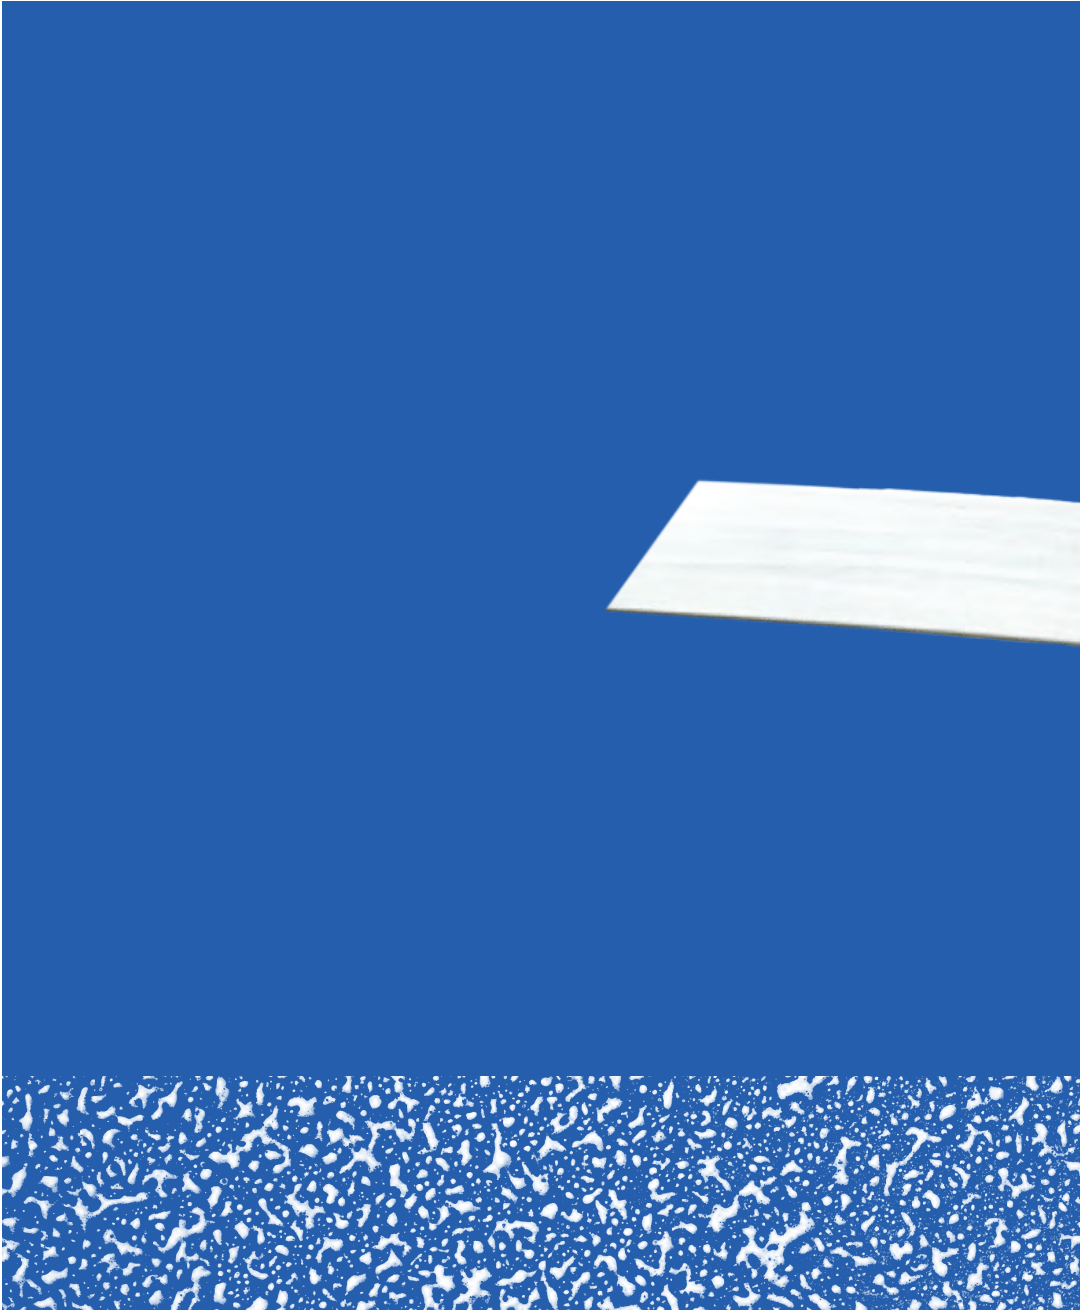

spraylock.com

REV: J
SKU: CATALOG
DATE: 03.14.22