

Statement of Performance

December 4, 2008

Product Description

- **Formula:** Spray-Lock® FRP Adhesive
- **Material:** Glassteel/Glasliner FRP
- **Material Acclimatization:** 48 Hours at 72 °F or 22 °C
- **Substrate Used:** Drywall

General Adhesive Information

- See Technical Data for adhesive specifications

Performance

The test results produced a strong bond with acceptable peel and shear strength. Materials tested are approved for use with our adhesive over acceptable substrates. Spray-Lock® does not warrant the dimensional stability of the product or material regardless of its thickness.

Application Notes


Adhesive was applied as per standard instructions

Approved by



Michael Land
Director of R&D & Tech Services

Image of Material

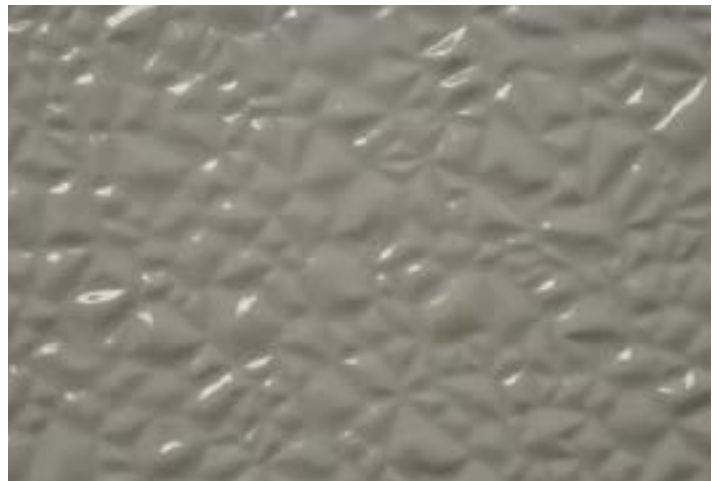

Spray-Lock is not responsible for bond performance changes due to conditions beyond our control such as manufacturing changes, composition changes, profile or finish changes, storage, or application techniques. Internal quality control methods were followed unless otherwise noted. This document does not represent the opinion of the material manufacturer. This report shall not be reproduced except in full and with permission from Spray-Lock. Spray-Lock retains sole ownership of the data. Spray-Lock does not warrant the dimensional stability of the product or material regardless of its thickness. Spray-Lock Adhesives should always be used in accordance with Spray-Lock's issued instructions and procedures consistent with country specific standards for floor preparations and installation.