

## PRODUCT DESCRIPTION

|                                 |                              |
|---------------------------------|------------------------------|
| <b>FORMULA</b>                  | FRP                          |
| <b>FLOORING MATERIAL</b>        | Koroseal / Traffic Patterns® |
| <b>MATERIAL ACCLIMATIZATION</b> | 48 Hours at 72°F or 22°C     |
| <b>SUBSTRATE USED</b>           | Concrete                     |
| <b>ADDITIONAL INFO</b>          | Includes Both Tile and Plank |

## PERFORMANCE

The test results produced a strong bond with acceptable peel and shear strength. Materials tested are approved for use with our adhesive over acceptable substrates. Spray-Lock does not warrant the dimensional stability of the flooring material regardless of its thickness.


## GENERAL ADHESIVE INFO

See Technical Data for adhesive specifications.

## APPLICATION NOTES

Adhesive was applied as per standard instructions.

## IMAGE OF MATERIAL

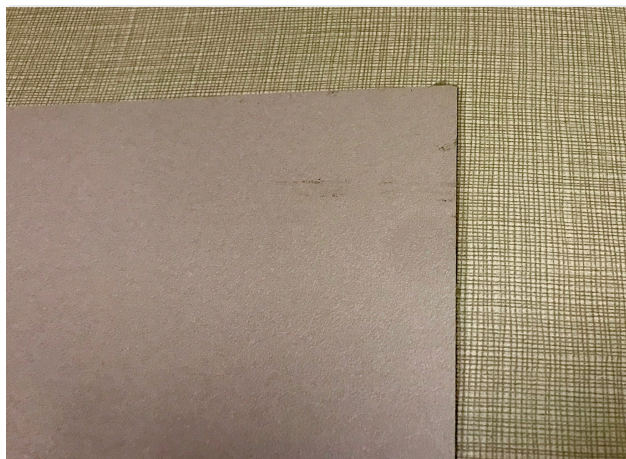

## ADDITIONAL INFO

This report applies to the specific product as supplied to Spray-Lock for testing at the time of the test. This document does not represent a guarantee or promise of performance of the products listed. It only describes testing performed under Spray-Lock's conditions. It is not a warranty.

APPROVED BY:



**Michael Land**

Senior V.P. of R&D and Technical Services

Spray-Lock is not responsible for bond performance changes due to conditions beyond our control such as manufacturing changes, composition changes, profile or finish changes, storage, or application techniques. Internal quality control methods were followed unless otherwise noted. This document does not represent the opinion of the material manufacturer. This report shall not be reproduced except in full and with permission from Spray-Lock. Spray-Lock retains sole ownership of the data. Spray-Lock does not warrant the dimensional stability of the flooring material regardless of its thickness. Spray-Lock Adhesives should always be used in accordance with Spray-Lock's issued instructions and procedures consistent with country specific standards for floor preparations and installation.